


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER


ORIGINAL

(1)

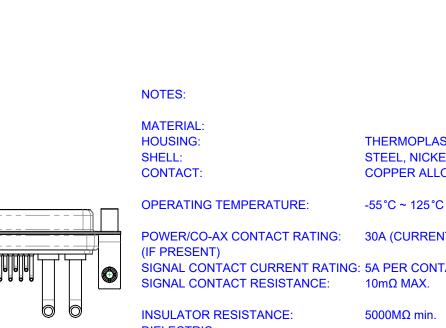

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED

COPPER ALLOY, GOLD FLASH PLATED

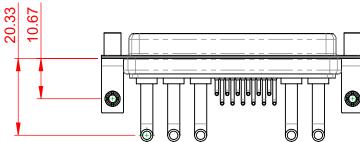


30A (CURRENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

 $10m\Omega$ MAX.

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/20	19
		CHECKED:	DATE:	
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 630-17W5250-3N5		ISSUE
		PART NUMBER: 630-17W	5250-3N5	1



THIS SERIES FULLY CONFOR THE EUROPEAN UNION DIRI 2011/65/EU FOR RoHS COMP

RMS TO	
ECTIVES	
PLIANCY.	

