

## Data sheet | Item number: 787-1721


Switched-mode power supply; Eco; 1-phase; 12 VDC output voltage; 8 A output current; DC-OK LED



[www.wago.com/787-1721](http://www.wago.com/787-1721)



 Picture differs from the item.

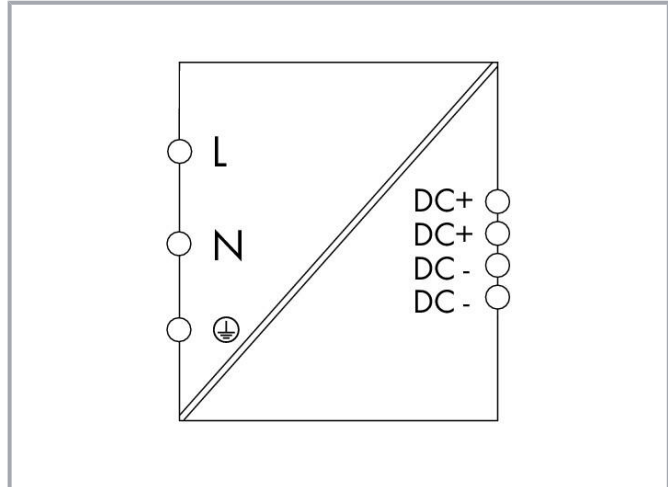

## Item description

### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Data****Technical data****Input**

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 125 ... 375 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current $I_i$	$\leq 3$ A (100 VAC)
Inrush current	$\leq 18$ A
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 10$ ms (230 VAC)

**Output**

Nominal output voltage $U_{o\text{ nom}}$	DC 12 V (SELV)
Output voltage range	DC 10 ... 14 V (adjustable)
Nominal output current $I_{o\text{ nom}}$	8 A (12 VDC; 110 ... 240 VAC); 6.4 A (12 VDC; 100 ... 240 VAC)
Nominal output power	96 W
Residual ripple	$\leq 150$ mV (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.4 \times I_{o\text{ nom}}$ ); Shutdown and automatic restart in the event of a short circuit

**Signaling and Communication**

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED ( $U_o$ )

**Efficiency/power losses**

Power loss $P_l$	$\leq 20$ W (230 VAC; 12 VDC; 8 A)
Efficiency (typ.)	80 % (230 VAC; 8 ADC)

**Circuit protection**

Internal fuse	F 3.15 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: B6, B10

Subject to changes. Please also observe the further product documentation!



## Safety and protection

Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes, for 2 devices of the same type
MTBF	> 300,000 h (per IEC 61709)

## Connection data

Connection type 1	Input/Output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

## Physical data

Width	60 mm / 2.362 inches
Height	130 mm / 5.112 inches
Depth from upper-edge of DIN-rail	99 mm / 3.898 inches

## Mechanical Data

Mounting type	DIN-35 rail Screw mount
---------------	----------------------------

## Material Data

Fire load	0.129 MJ
Weight	520 g

Subject to changes. Please also observe the further product documentation!

## Environmental requirements

Ambient temperature (operation)	-20 ... +60 °C
Ambient temperature (storage)	-25 ... +75 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	-3 %/K (> 40 °C)

## Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 61558-2-6 EN 62368-1 SEMI F47

## Commercial data


eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143656047
Customs tariff number	85044083900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	a5e63e98-4abc-449e-93f0-a25016d19c93
SCIP notification number (Czech Republic)	82bf8ab0-f59d-449e-8540-7c37edebce65

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B. 00089_19



Subject to changes. Please also observe the further product documentation!

## Declarations of conformity and manufacturer's declarations



Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
	UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

## Optional accessories

## Marking accessories

Marking strip			
	<b>Item no.: 210-831</b> Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white		<a href="http://www.wago.com/210-831">www.wago.com/210-831</a>
	<b>Item no.: 210-832</b> Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white		<a href="http://www.wago.com/210-832">www.wago.com/210-832</a>

## Tool

Operating tool			
	<b>Item no.: 210-769</b> SCREWDRIVER; green		<a href="http://www.wago.com/210-769">www.wago.com/210-769</a>
	<b>Item no.: 210-720</b> Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured		<a href="http://www.wago.com/210-720">www.wago.com/210-720</a>

## Downloads

## Documentation

## Bid Text

787-1721 docx - Datei	2019 Nov 25	docx 17.9 kB	Download
787-1721 X81 - Datei	2019 Oct 1	xml 6.9 kB	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



### Instruction Leaflet

Primary Switch Mode Power Supply ECO-Power VDC 12, 8 A	V 1.3 2020 Dec 21	pdf 255.5 kB	Download
---	----------------------	-----------------	----------

### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

### CAD/CAE-Data

#### CAD data

2D/3D Models 787-1721	URL	Download
-----------------------	-----	----------

#### CAE data

EPLAN Data Portal 787-1721	URL	Download
----------------------------	-----	----------

ZUKEN Portal 787-1721	URL	Download
-----------------------	-----	----------

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 787-1721 Switched-mode power supply; Eco; 1-phase; 12 VDC output voltage; 8 A output current; DC-OK LED	URL	Download
---	-----	----------

### Installation Notes

### Product family

**EPSITRON ECO Power**  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!