

T	۵	п	m	0



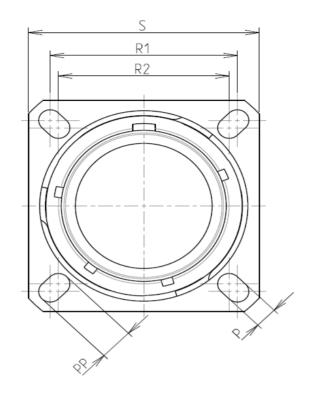



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	65℃ to +175℃				
-Salt Spray	: 500 hours				

8D 0

G

17

W

20

В


F

В

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

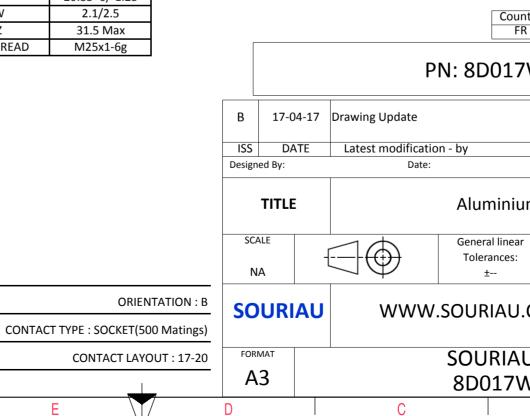

	Φ		A				
a					4		
1							
	0						
		A					
	1						
S EX4	AMPLE				3		
//	KAMPLE						
- 2014	non-conformit	ty or damage					
s whic	ch does not co	mply with					
er of the Parties or by a third party adation, technical notice.)							
untry							
R	Not Listed						
7W20BB							
				l			
				MOD N°			
		CUSTOME	R DRAWING				
um	n Receptacle 8D series						
ar	NPRDS / PROJECT						
	859 This document is the property of						
J.CC	COM SOURIAU it must not be reproduced or						
	communicated without permission						
	J DRG N° SHEET /20BB-C 1/2						
	B A						

Г	т	۵	г	m		0
4	(Contact Layout 20*			<u>ک</u>	QUARE FLANGE RECEPTACLE (TYPE 0)
		4#12 16#22D 17-20			<u>+</u>	
ω	Ctc A B C D 1 2 3 4 5	X Y 0 5.51 3.17 0 0 -5.51 -3.17 0 4.16 7.06 4.29 4.29 7.11 4.03 8.05 1.4 8.05 -1.4				Max. thickness panel for receptacle: Type 0: front m
N	6 7 8 9 10 11 12 13 14	8.05 -1.4 7.11 -4.03 4.29 -4.29 4.16 -7.06 -4.16 -7.06 -4.29 -4.29 -7.11 -4.03 -8.05 -1.4 -8.05 1.4 -7.11 4.03				SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend Coun FR PN: 8D017
	15 16	-4.29 4.29 -4.16 7.06			B 17-04-17 ISS DATE Designed By: TITLE	Drawing Update Latest modification - by Date: Aluminiu
<u> </u>					SCALE NA SOURIAU	General linear Tolerances: ±
	Н	G	F	E	FORMAT A3 D	SOURIAU 8D017V C

