



LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Nickel
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +200°C
- Salt Spray : 2000 hours
- Mass : 29.6 g ± 10%


| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 32.5 Max |
| Z'                  | 31.5 Max |
| VV THREAD           | M22x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

**PN: 8D515M19SB**

|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 19-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |

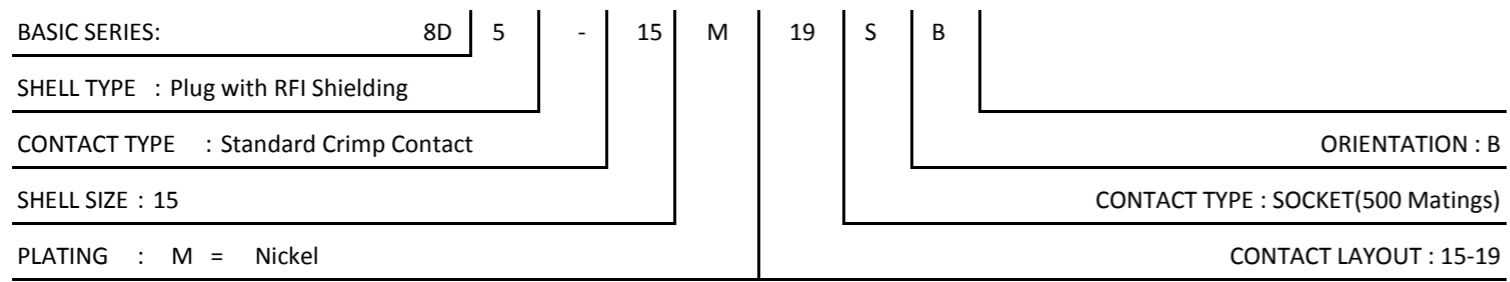

|                     |    |   |                               |
|---------------------|----|---|-------------------------------|
| <b>TITLE</b>        |    | Composite Plug 8D series  |                               |
| SCALE               | NA | General linear Tolerances: ±--  | NPRDS / PROJECT<br><b>859</b> |
| <b>SOURIAU</b>      |    | WWW.SOURIAU.COM   |                               |
| FORMAT<br><b>A3</b> |    | SOURIAU DRG N°<br><b>8D515M19SB-C</b>   |                               |
|                     |    | This document is the property of SOURIAU it must not be reproduced or communicated without permission |                               |
|                     |    | SHEET<br>1/2  |                               |

4  
3  
2  
1

Contact Layout



| Contacts<br>(Insert arrangement 15-19) |             |             |                     |             |             |
|--|-------------|-------------|---------------------|-------------|-------------|
| Contact position ID                    | Location    |             | Contact position ID | Location    |             |
|  | X-axis (mm) | Y-axis (mm) |                     | X-axis (mm) | Y-axis (mm) |
| A                                      | +000 (0.00) | +225 (5.72) | L                   | -195 (4.95) | +113 (2.87) |
| B                                      | +130 (3.30) | +225 (5.72) | M                   | -130 (3.30) | +225 (5.72) |
| C                                      | -195 (4.95) | +113 (2.87) | N                   | -005 (1.05) | +113 (2.87) |
| D                                      | +260 (6.60) | +000 (0.00) | P                   | +065 (1.65) | +113 (2.87) |
| E                                      | +195 (4.95) | -113 (2.87) | R                   | +130 (3.30) | +000 (0.00) |
| F                                      | +130 (3.30) | -225 (5.72) | S                   | +065 (1.65) | -113 (2.87) |
| G                                      | +000 (0.00) | -225 (5.72) | T                   | -065 (1.65) | -113 (2.87) |
| H                                      | -130 (3.30) | -225 (5.72) | U                   | -130 (3.30) | +000 (0.00) |
| J                                      | -195 (4.95) | -113 (2.87) | V                   | +000 (0.00) | +000 (0.00) |
| K                                      | -260 (6.60) | +000 (0.00) | ---                 | ---         | ---         |

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| 15         | -19             | 19                 | 20            | I              | All              | MS20052-19 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D515M19SB

|                |                                    |                            |   |
|----------------|------------------------------------|----------------------------|---|
| A              | 19-10-2016                         | First Release              |   |
| ISS            | DATE                               | Latest modification - by   | MOD N°  |
| Designed By:   |                                    | Date:                      | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | <b>Composite Plug 8D series</b>    |                            |   |
| SCALE          |                                    | General linear Tolerances: | NPRDS / PROJECT   |
| NA             |                                    | ±--                        | <b>859</b>  |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>             |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D515M19SB-C</b> |                            | SHEET 2/2   |