
			0			
	ØS					
			LAY	OUT SHOWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic	Connector dimensionDimNominalØS35.7 MaxZ'31.5 MaxVV THREADM25x1-6g		due to a use the Specifications	ot be liable for any non-conform of the Products which does not co issued by either of the Parties or	omply with by a third party	
-Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer Contact Plating : Cold over copper Alloy 0.8um minimum			(professio	onal recommendation, technical r Country Juris FR	diction & Control List Not Listed	
-Contact Plating       : Gold over copper Alloy 0.8μm minimum         -Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories			F	PN: 8D517J06SE	Not Listed	
-Temperature Range <u>:</u> -65°C to +175°C -Salt Spray : 2000 hours		A	14-10-2016 First Release			
Mass : 35.5 g ± 10%		ISS Designed	DATE Latest modificatio J By: Date:	n - by	CUSTOMER DRAWING	MOD N°
		1	TITLE	Composite Plug 8	BD series	
BASIC SERIES: 8D 5 - 17 J SHELL TYPE : Plug with RFI Shielding	06 S E	SCAL		General linear Tolerances: ±	NPRDS / PROJECT <b>859</b>	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17	OF CONTACT TYPE : SOCKET		JRIAU WWW.	SOURIAU.COM	This document is the prop SOURIAU it must not be reproduc communicated without per	ed or
PLATING : J = Olive drab Cadmium		AYOUT : 17-06		SOURIAU DRG N° 8D517J06SE-C		SHEET 1/2
H G	F E	D	C	B	A	

-	Ξ	۵	וד	m		0	
		Contact Layout					
4		F A					
	-x -	$ \stackrel{\mathbb{E}}{\bigoplus} \stackrel{\mathbb{A}}{\bigoplus} $ $ \stackrel{\mathbb{D}}{\bigoplus} \stackrel{\mathbb{E}}{\bigoplus} \stackrel{\mathbb{C}}{\bigoplus} \stackrel{\mathbb{B}}{\bigoplus} $ $ \cdot \times $					
	Contar position A B C	(mm)         (mm)           +.121 (3.07)         +.209 (5.31)           +.241 (6.12)         +.000 (0.00)           +.000 (0.00)        241 (6.12)					
ى	D E F Shell Arrangement Nur	121 (3.07) +.209 (5.31) +.000 (0.00) +.000 (0.00) her of Size Service Contact Supersedes	1				
	size no. con	tacts contacts rating location 6 12 I All MS20053-6					
	L						
						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wl y either o
N							Count FR
						PN: 81	D517
					A 14-10-20	D16 First Release	
					Designed By:	Date:	
					SCALE		Compo al linear
<b>→</b>					NA		ances: ±
					SOURIA		
					FORMAT A3	SOU 8D	RIAU 517J
	Н	G	F	E	D	С	

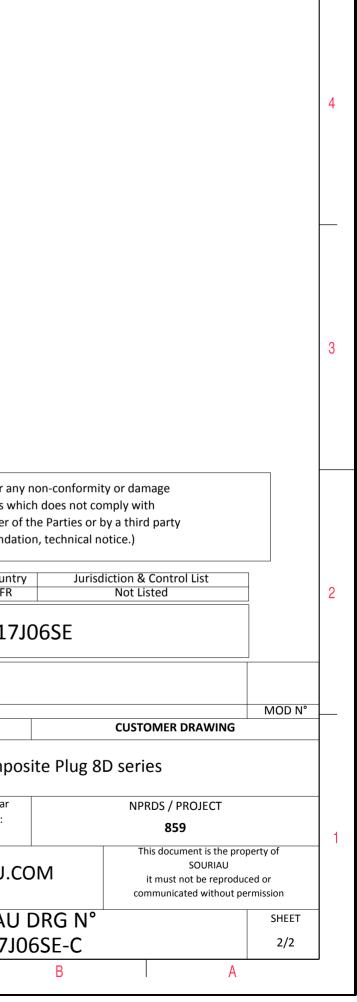

 $\triangleright$ 

σ