


## SM21N391J302AM

KPS SM SMD Indust COG HV, Ceramic, 390 pF, 5%, 3000 VDC, COG, SMD, Fixed, High Volt, Low ESR, Leaded, Mil-Screen, SM21

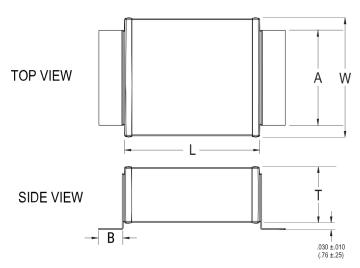

Click here for the 3D model.

Dimensions	,
Chip Size	SM21
L	5.08mm +/-0.508mm
W	5.08mm +/-0.508mm
Т	4.572mm MAX
A	2.54mm MAX
В	2.54mm +/-0.508mm

Packaging Specifications		
Packaging	Tray	
Packaging Quantity	50	

General Information	
Series	KPS SM SMD Indust COG HV
Style	SMD Chip
Description	SMD, Fixed, High Volt, Low ESR, Leaded, Mil-Screen
Features	Low ESR, Mil-Screen
RoHS	With Exemptions
REACH	SVHC (Pb - CAS 7439-92-1)
Termination	Silver
Marking	No
Testing and Reliability	Level A
AEC-Q200	No
Shelf Life	78 Weeks
MSL	1

Specifications	
Capacitance	390 pF
Capacitance Tolerance	5%
Voltage DC	3000 VDC
Dielectric Withstanding Voltage	3600 VDC
Temperature Range	-55/+125°C
Temperature Coefficient	COG
Dissipation Factor	0.15%
Insulation Resistance	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.