



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	1

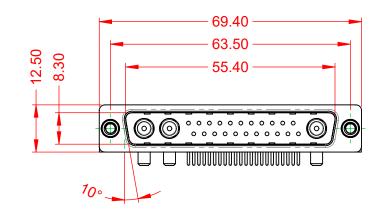






MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

40500

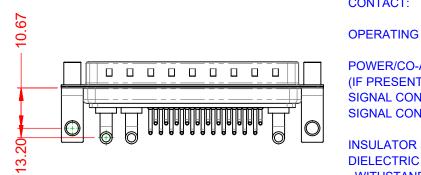

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY							
			COMBINATION D-SUB DRAWN: C.B			DATE: JAN. 01/2019			19	
			CHECKED:			DATE:				
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE:	(IN C.A.D. 1:1)		SHEET	1	OF	2	
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-25W3240-316				ISSUE			
YOUR CONNECTION TO			PART NU	MBER: 629	9-25W3	3240-3T6	;		1	

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

YOUR CONNECTION TO	EDAC INC TORONTO, ONTARIO CANADA QUALITY & SERVICE	THESE DRAV ARE THE PR SHALL NOT I OR USED AS MANUFACTU WITHOUT W

WITHSTANDING VOLTAGE:

