


Data sheet | Item number: 706-3057/202-200









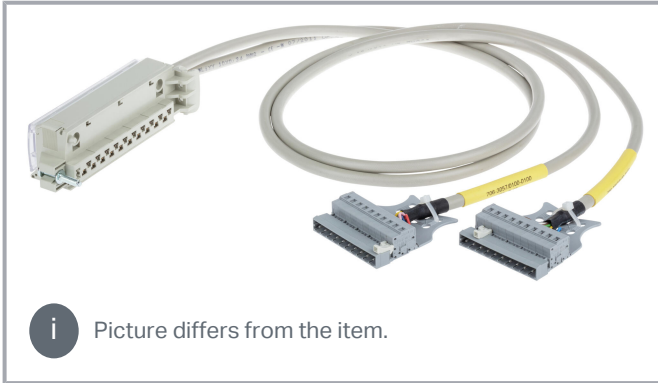



System cable; for Schneider TSX; 8 digital outputs for higher voltages;
Length: 2 m; Conductor cross-section: 0.34 mm²



www.wago.com/706-3057/202-200



 Picture differs from the item.

Color coding acc. to DIN VDE 47100		Connector WAGO 231 (JA)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	OUT0.0	1	L0
Brown		2	OUT0.1	2	L1
Green		3	OUT0.2	3	L2
Yellow		4	OUT0.3	4	L3
Grey		5	OUT0.4	5	L4
Pink		6	OUT0.5	6	L5
Blue		7	OUT0.6	7	L6
Red		8	OUT0.7	8	L7
Black		9	L	5+10+ 15+20	C0-15
Violet		10	nc	nc	cn
Grey-Pink		11	nc	nc	nc
Red-Blue		12	nc	nc	nc

Data Notes

Note

If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

Electrical data

Inputs/outputs	8 digital inputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Compatibility

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Schneider**

Schneider TSX	TSX DSY 08S5
---------------	--------------

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	WAGO 231 Series
Pole number 1	10
Connection type 1	System
Wire cross-section	0.34 mm ²

Connection 2

Connector 2	Schneider TSXBLY01
Pole number 2	20
Connection type 2	System

Physical data

Cable length	2 m
--------------	-----

Material Data

Weight	446 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	FR
GTIN	4055143980036

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Customs tariff number

85444290900

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

pdf

Download

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

545.9 kB

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3057/202-200

URL

Download

System cable; for Schneider TSX; 8 digital outputs for higher voltages; Length: 2 m; Conductor cross-section: 0.34 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.