
工	G	нт. П	т	C C





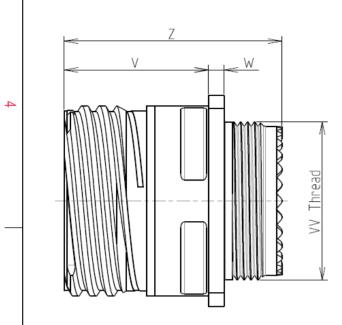

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65℃ to +175℃			
-Salt Spray	: 500 hours			

: 13.92 g ± 10%

8D 0

G

11

W

22


S


F

В

Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е



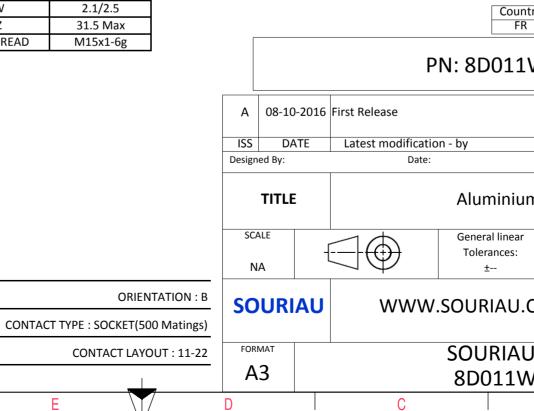

	σ		A			
					4	
S EXA	AMPLE				3	
s whic er of t	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2	
1W22SB						
				MOD N°		
		CUSTOME	R DRAWING			
um	m Receptacle 8D series					
ar :			' PROJECT 59			
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
UDRG N° SHEET						
	22SB-C			1/2		
	В		А			

		_				
		Contact Layout				Panel Cut SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(0 0 ⁰			2	
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905			<u>, v</u>	
ယ	C D	-1.905 -1.905 -1.905 1.905				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend
S						Cour FI PN: 8D011
					A 08-10- ISS DA Designed By:	2016 First Release TE Latest modification - by Date:
_					TITLE SCALE NA	Aluminiu General linear Tolerances: ±
					SOURI	
	Н	G	F	E	A3	SOURIA 8D011\ C
			•	_	V _	

Т

ш

т

G

0

