
ſ	T	Q	т	m			O
4	R 22.6 Max	W Deard					
			Keying Shown as	example			
	CHARACTERISTICS				-		
	-Standard : Based on MIL-DTL-38999 Sei	ries III		Connector dimension Dim Nominal	_		
C N	-Durability : 500 Mating cy	ner per Alloy 0.8μm minimum cles		A 49.2±0.3 B 33.32+0.1/-0.15 R 32.5Max S 46±0.4 W 3+0.9/-0.1 VV THREAD M28x1-6g			SOURIAU sha due to a us the Specificatio (profes
	-Delivered with Souriau contacts and Ac -Temperature Range : -65°C to +200° -Salt Spray : 500 hours					A 30-09-2016	First Release
	Sale Spray . 500 Hours					SS DATE	Latest modifica
					De	signed By: TITLE	Date
_	BASIC SERIES: 81 SHELL TYPE : Jam nut Receptacle	D 7 - 19 9	5 32 P N			SCALE -[NA	$\square \bigoplus$
	CONTACT TYPE : Standard Crimp Cont	act		ORIE		OURIAU	WWV
	SHELL SIZE : 19			CONTACT TYPE : PIN(5			~ ~ ~ V V
	PLATING : S = Nickel			CONTACT LAY	001.19-32	FORMAT	
	Ι					A3	
	Н	G	F	E \	/ D		С

 \checkmark

Œ	A				
		4			
LAYOUT SHOWN AS EXAMPLE		3			
all not be liable for any non-conformity or damage use of the Products which does not comply with ons issued by either of the Parties or by a third party essional recommendation, technical notice.) <u>Country</u> Jurisdiction & Control List <u>FR</u> Not Listed PN: 8D719S32PN					
ation - by MOD N° te: CUSTOMER DRAWING Stainless Steel Receptacle 8D series					
General linear Tolerances: ± This document is the property of SOURIAU					
W.SOURIAU.COM SOURIAU DRG N° 8D719S32PN-C	it must not be reproduce communicated without perr				
В	A				

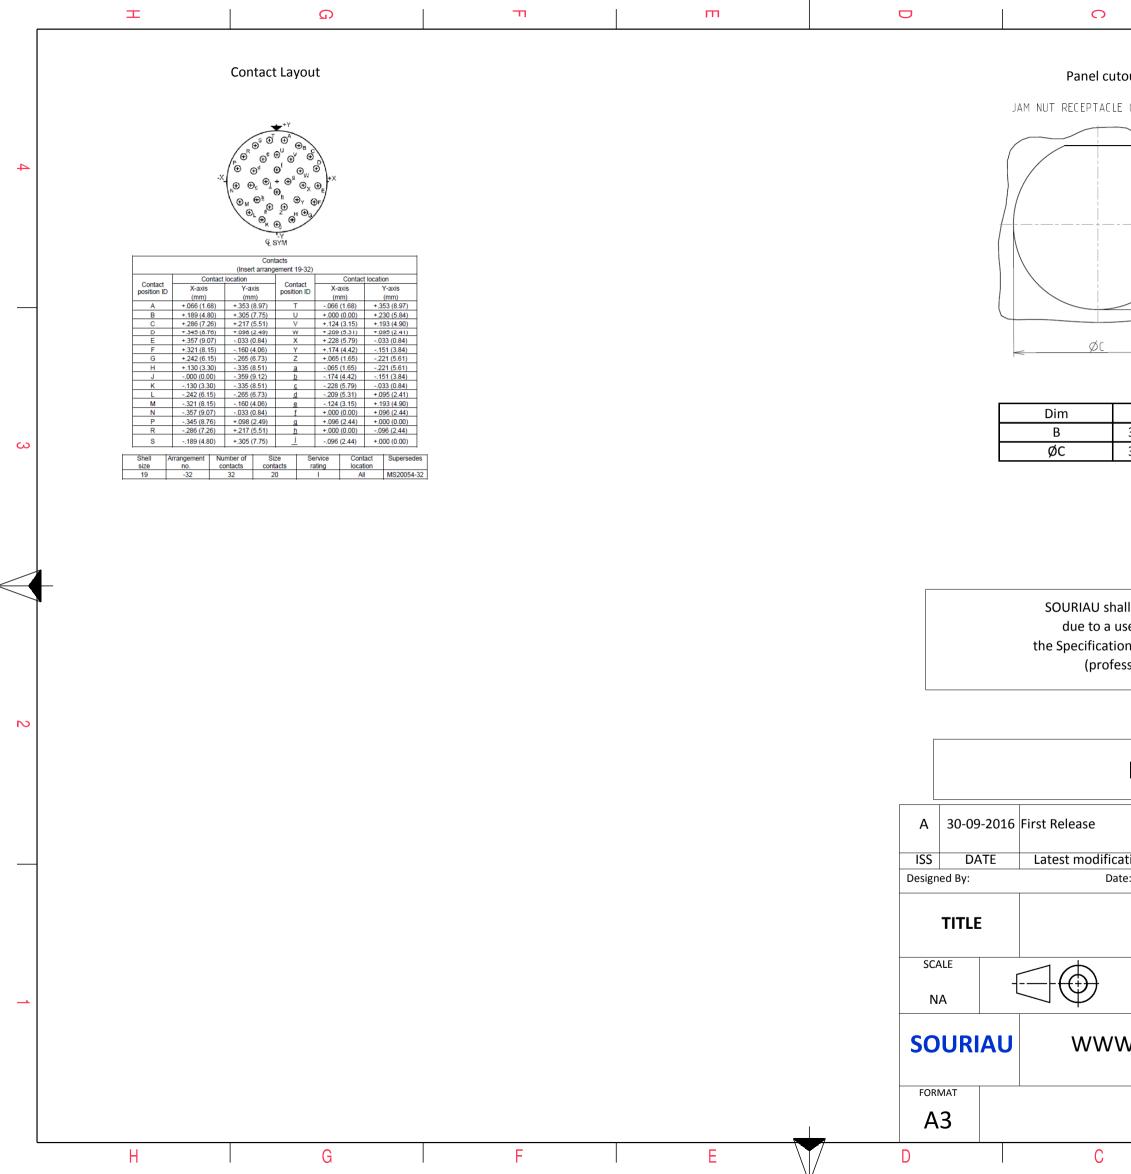

			Ξ		А		
	YPE 7)	A.					4
	Nominal 3.91+0/-0. 5.18+0.25,	.25					3
use o ons essic	of the Pro issued by onal recor	ducts whic either of t	n, technical n Jurisd	mply with by a third part			2
atio ate:	n - by Stainle	ess Stee	l Recepta	CUSTOMER		MOD N°	
	Toler	al linear ances: :		NPRDS / 85			1
W.SOURIAU.COM it must not be reproduced or communicated without permission							
SOURIAU DRG N° SHEET 8D719S32PN-C 2/2							
			В		А		J