

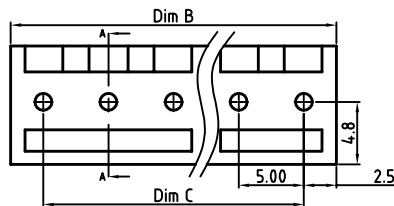
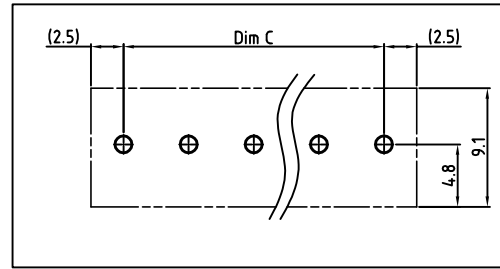


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!




SECTION A-A

Material

- Insulator (Body): Thermoplastic (UL94V-0)
- Pin: Brass, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 15A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: (pending )

RoHS Compliant

PART NUMBER:


OSTKGXX0080

No. of Poles
02: 2 Poles
:
:
24: 24 Poles

COLOR
0: Black
5: Green
6: Blue
8: Grey (Standard)

Poles	2	3	4	5	6	7	8	9	10	11	12	13
Dim A	7.80	12.80	17.80	22.80	27.80	32.80	37.80	42.80	47.80	52.80	57.80	62.80
Dim B	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
Dim C	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
TOL	±0.15						±0.20					
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	67.80	72.80	77.80	82.80	87.80	92.80	97.80	102.80	107.80	112.80	117.80	
Dim B	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	
Dim C	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	
TOL	±0.30						0.40					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.											
TITLE: OSTKG - 5.0mm shrouded header											
PART NO. OSTKGXX0080			DWG NO. OSTKGXX0080.DWG			APPROVED			CHECKED		
DESIGNED: Tason			DRAWN: Tason			CUST NO.			Tolerance		
2007.09.17			2007.09.17			SHEET: 01/01			UNIT: mm		
						SCALE: NONE			X.X ±0.5		
						REV: A			X.XX ±0.3		
									X° ±1°		

1 2 3 4 5 6 7

E

D

C

B

A

1 2 3 4 5 6 7