

# S CN BN - J 1 1 50 - SO IPM

SUNTSU

CONNECTOR

BNC

Connector Type  
Jack







Rows

Connectors  
per Row

Impedance  
50

Contact Termination  
Solder

Mounting Style  
Isolated from  
Panel

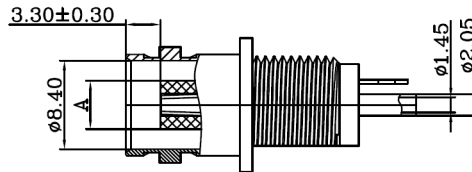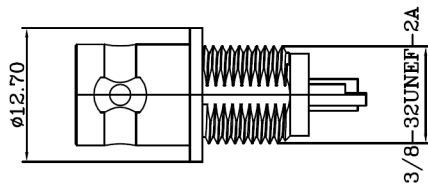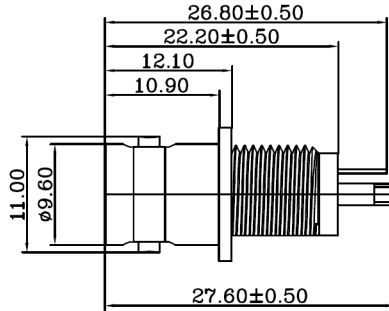

1. Materials:

- a) Body: Zinc Nickel Plated
- b) Contact: Brass Nickel Plated
- c) Insulator: ABS White

- 2. Normal Impedance: 50Ω
- 3. Frequency Range: 0-2 GHz
- 4. Max Peak Voltage: 500V
- 5. Dielectric Strength: 1500V RMS
- 6. Insulation Resistance: 5000MΩ/Min



BNC FEMALE ISOLATED FROM PANEL  
WITH MOLDED THERMO PLASTIC  
INSULATION

Document History				Part No.	REV.	Drawn		Page
Edits Made	Date	Edited By	Approved By			A	B. Gibbons	
Initial Release	06/28/2021	B. Gibbons	KH Mun	SCNBN-J1150-SOIPM	SCALE	Checked		1 / 1
					None	KH Mun 06/28/2021		
				Tolerance	UNIT	Approved		
					mm	KH Mun 06/28/2021		

0.5-15 = ±0.15  
15-30 = ±0.30  
30-120 = ±0.60  
>120 = ±1.00