



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00402	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, white, molding style	1	
2	30-00178	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00265	Overmold, audio plug, 3.5 mm, twist lock, TIC	1	PVC, white
4	Heat Shrink	Heat shrink tubing, white	1	
5	Heat shrink	Heat shrink tubing, black	1	Covers shield wire

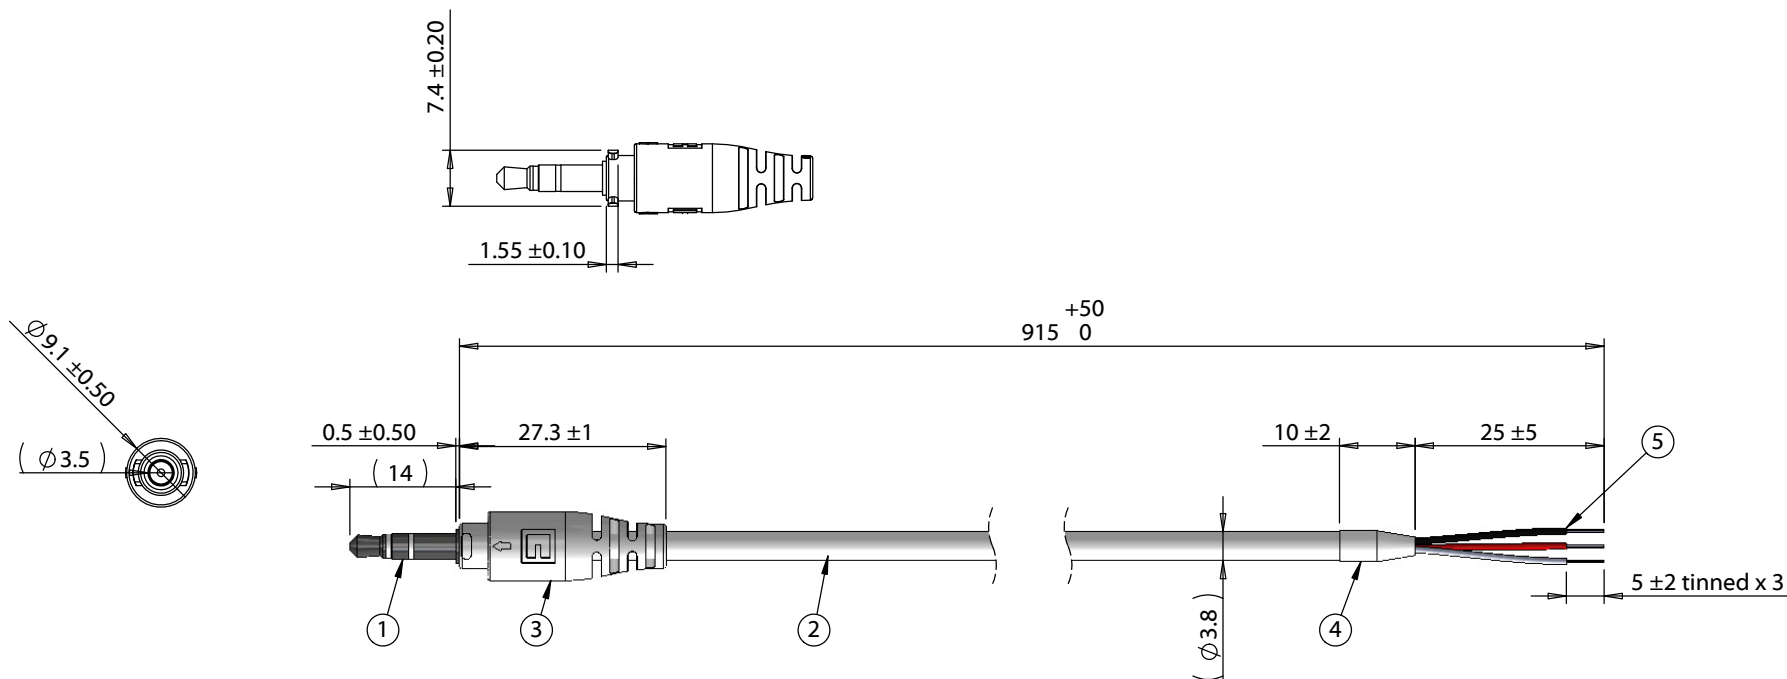

Notes:
 Made to mate with cable assembly: 10-03408 and 10-03412
 Functionally equivalent components may be substituted



Wiring Diagram	
50-00402	wire color
A	red
B	white
C	shield/black

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	9/24/2019	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 915 mm, 3.5 mm 3C 50-00402 twist lock audio plug to 5 mm tinned, 28 AWG, 30-00178, white	Size: A Part number: 10-03407
					Scale: 1:1

5

4

3

2

1