
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00981	Connector, 5 pin M12 A-code socket, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded	1	
2	50-00988	Connector, 5 pin M12 A-code plug, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded	1	
3	30-01586	Wire, 5C TS, 22 AWG, UL20387, 300V, 105C, 60C oil, UV, 6.5 mm, shielded, VW-1, PVC, 80A, black	1	
4	24-00349	Overmold, M12 plug and jack, 180°	2	PVC, black

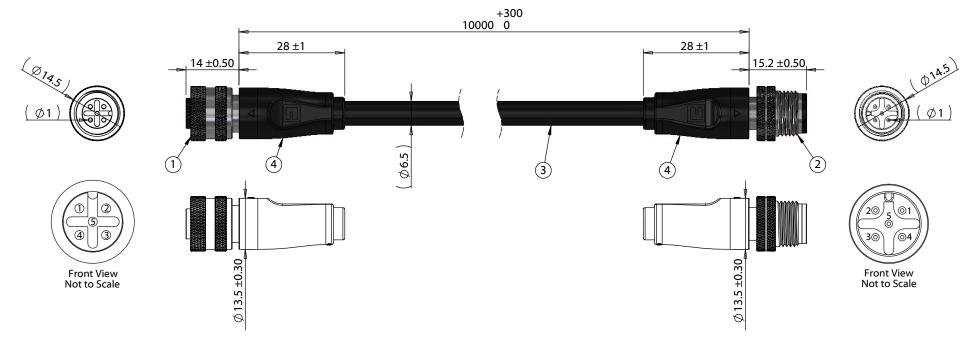

Notes:

Cable rated for 60 V, 4 A Temperature: -40 ~ 105 °C Oil resistant up to 60 °C Water resistant up to 75 °C **UV** resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

Wiring Diagram				
50-00981	wire color	50-00988		
1	red	1		
2	yellow	2		
3	black	3		
4	white	4		
5	blue	5		
Shell	shield/drain	Shell		

Revision:	Date:	Description:	Prepared:	Notes:			
A	10/15/2020	Initial release	Verified: RoHS compliant Function test: no open, no short circuit, no intermittent		rt circuit, no	tel 1.541. fax 1.541.	
			millimeters. Tolerances: X: ± 0.5 mm XXX: ± 0.3 mm XXXX: ± 0.05 mm	Description: Cable, 10000 mm, 1.0 mm 5C 5 to 1.0 mm 50-00988 M12 plug, wire		Size: A Scale:	Part nu 10-03
	!	5	4	3	2	1	

41.323.3228 *800* 877.670.7118 41.323.4202 *web* tensility.com

Size:	Part number:			
Α	10-03852			
Scale:	1:1		Sheet 1 of 1	

3 2