

**Ratings**

Voltage: 300 V  
Temperature  
Static: -40 to 105 °C  
Dynamic: -20 to 105 °C  
Flammability: VW-1  
Water resistant: 75 °C  
Oil resistant: 60 °C (jacket)  
≥50% elongation and tensile strength after aging  
UV resistance: jacket, 720 hours xenon or carbon arc exposure  
≥80% tensile strength and elongation after aging

**Conductor**

Conductor count: 8  
Gauge: 30 AWG 0.05 mm<sup>2</sup>  
Material: tinned copper strands  
Strand size: Ø 0.1 mm x 7  
Resistance at 20 °C: 381 Ω /km Max

**Insulator**

Material: PVC  
Color: red, black, white, yellow, blue, green, orange, purple  
Diameter: Ø 1.1 ±0.10 mm  
Nominal thickness: 0.38 mm  
Resistance at 20 °C: 10 MΩ /km Min

**Filler**

Material: cotton rope

**Drain**

Stranding: Ø 0.1 mm x 7  
Material: tinned copper strands

**Shield**



Type: aluminum mylar + tinned copper braid  
Coverage: 65% min braid, 100% foil  
Braid stranding: Ø0.10 mm

**Outer jacket**

Material: PVC, 80A  
Color: black  
Diameter: Ø 5.8 ±0.20 mm  
Nominal thickness: 0.78 mm

**Wire marking:** E339579 UL AWM STYLE 20387 30 AWG 105°C  
300V VW-1 60°C OIL RESISTANT UV RESISTANT TENSILITY

**Use:** External wiring

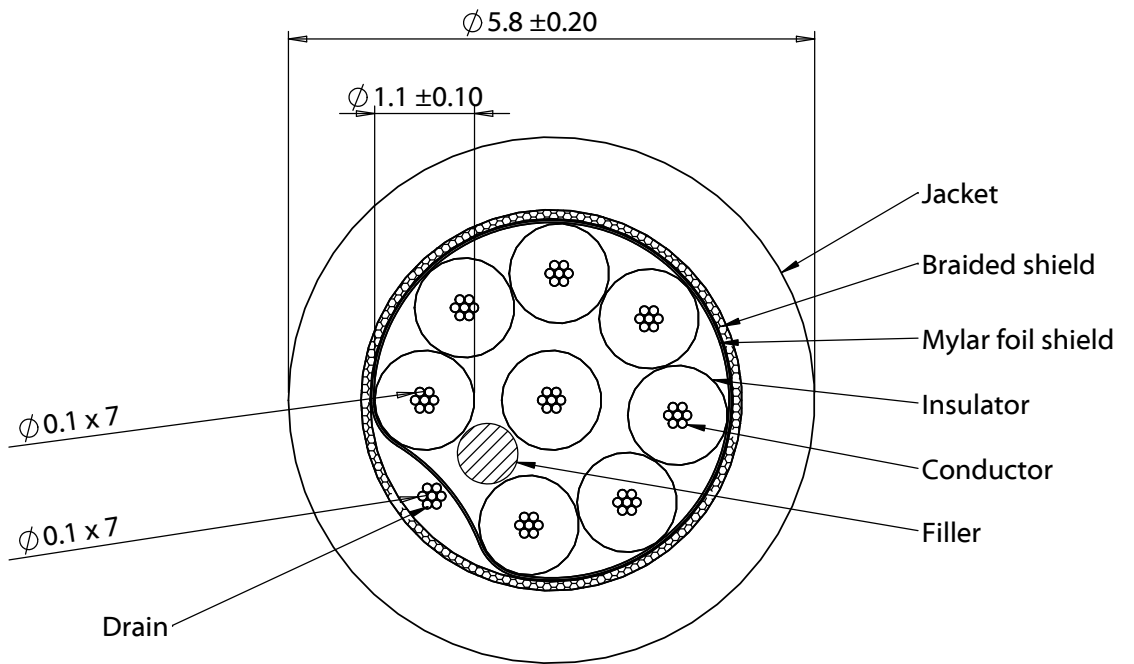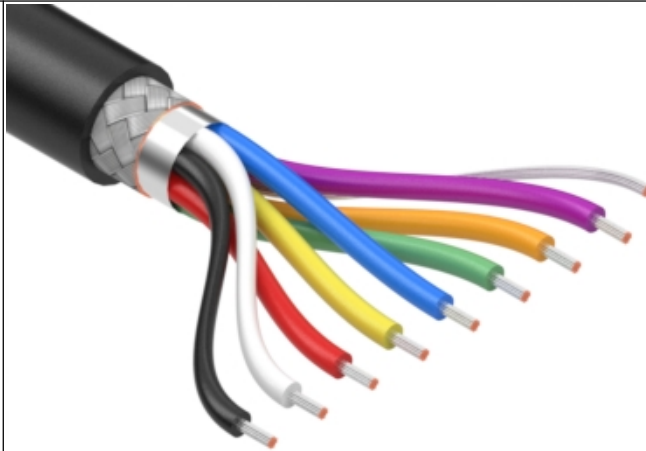

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	8/25/2020	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, 8C TS, 30 AWG, UL20387, 300V, 105C, 60C oil, UV, 5.8 mm, shielded, VW-1, PVC, 80A, black	A 30-01614
				Scale: 12:1	