

<b>—</b>	G	т	m	0



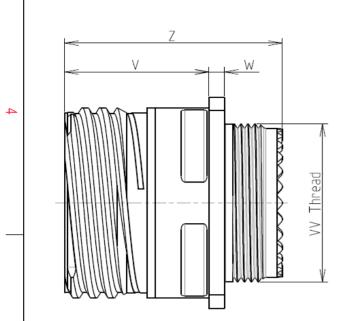

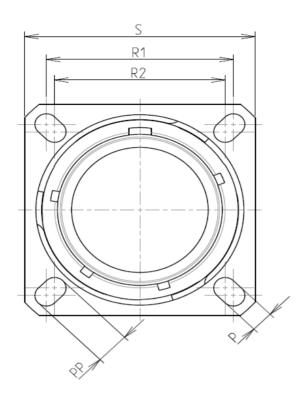

Keying Shown as example

## CHARACTERISTICS

ω

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	· -65°C to +200°C
	•
-Salt Spray	: 500 hours
-Mass	: 105.91 g ± 10%
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Sourian -Temperature Range -Salt Spray

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	31.75				
R2	29.36				
S	39.7±0.3				
V	20.07+0/-1.25				
W	2.1/3.2				
Z	31.5 Max				
VV THREAD	M31x1-6g				

D		0		Φ		A	
							4
		LAY	YOUT SHOWN AS EX	KAMPLE			3
		due to a use the Specifications	not be liable for any of the Products wh s issued by either of onal recommendati	ich does not co the Parties or b ion, technical n	mply with by a third party otice.)		
		F	Country FR PN: 8D0215		liction & Control I Not Listed	ist	2
	L1-2016 DATE	First Release Latest modificatio	an hu				лод N°
Designed By:		Date:	лт - Бу		CUSTOMER DR		
тіті	.E		Stainless Ste	el Recepta	icle 8D serie	S	
SCALE NA	-	$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PRC <b>859</b>	JJECT	1
SOUR	IAU	WWW	.SOURIAU.C		S it must not	nt is the property OURIAU be reproduced or d without permiss	r
FORMAT A3			SOURIAU 8D021S4			SHEET	
I AD			/ 1 / 1 / 1 / 1	~~ ``````		1	

	BASIC SERIES:	8D 0	D -	21	S	48	В	В			SCALE	-	=	Genera Tolera	al linear ances:
<b>→</b>	SHELL TYPE : Square Flange Re	eceptacle									NA		J W	±	
	CONTACT TYPE : Standard Cr	imp Contact							C	DRIENTATION : B	SOURI	AU	WWW	SOUR	IAU.
	SHELL SIZE : 21								CONTACT TYPE : SOCK	ET(500 Matings)					
	PLATING : S = Nickel								CONTACT	LAYOUT : 21-48	FORMAT			SOU	RIA
											A3			8D0	)219
	Н	(	G				F		E		D		С		

	т	۵	н П	m	D		0	
		Contact Layout						Panel Cut
4	×	<b>48</b>				2	QUARE FLANGE RECEPTACLE ( REAR MOUNTING R1	
	Ctc A B	4#8 Power 21-48 X Y 4.57 4.57 4.57 -4.57						ØT
ω	C D	4.57 -4.57   -4.57 -4.57   -4.57 4.57						Dim ØA ØAA R1 ØT
	-						the Specifications	of the Products
N								Cour FI PN: 8D02
_					A ISS Design		6 First Release Latest modificatio Date:	on - by
								Stainless S
<u> </u>					N		www	General linear Tolerances: ±

F

Е

G

Н

FORMAT

A3

D

С

