
ב בר	т (П		0	د <del>س</del>	>		
A Z' A L L L L L L L L L L L L L	ØS						
	Keying Shown as example		LAYOUT SHOWN AS	EXAMPLE			
<ul> <li>CHARACTERISTICS</li> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Olive drab Cadmium</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> </ul>	Connector dimensionDimNominalØS44.9 MaxZ'31.5 MaxVV THREADM34x1-6g		SOURIAU shall not be liable for any non-conformity or damage         due to a use of the Products which does not comply with         the Specifications issued by either of the Parties or by a third party         (professional recommendation, technical notice.)         Country       Jurisdiction & Control List         FR       Not Listed				
-Durability : 500 Mating cycles -Delivered without Souriau contacts -Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours		A 06-10-2016 ISS DATE Designed By:	PN: 8D523 First Release Latest modification - by Date:	J06PDL CUSTOMER DRAWING	MOD N°		
BASIC SERIES: 8D 5 - 23 J	06 P D L	SCALE	General linear Tolerances:	NPRDS / PROJECT 859			
SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 23 PLATING : J = Olive drab Cadmium	SHELL SIZE : 23 CONTACT TYPE : PIN(500 Matings)			NA     Image: Source and the property of communicated without permission       FORMAT     SOURIAU DRG N°     SHEE			
H G	FE	A3	8D523J	06PDL-C B	1/2 A		

_	т	۵	н П	т	D	0
		Contact Layout				
		06				
4						
		6#8 Concentric				
		Twinax Service M				
_		23-06				
	Ctc	X Y				
	A	0 9.24				
	В	8.81 2.87				
د د	C D	5.43 -7.49 -5.43 -7.49				
	E	-8.81 2.87				
	F	0 0				
	_					
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D523J
					A 06-10-20	16 First Release
					ISS DATE	Latest modification - by
					Designed By:	Date:
					TITLE	Compo
					SCALE	General linear Tolerances:
<u> </u>					NA	
					SOURIA	U WWW.SOURIAU.C
					FORMAT	SOURIAU
					A3	8D523J0
	Н	G	F	E	D	C

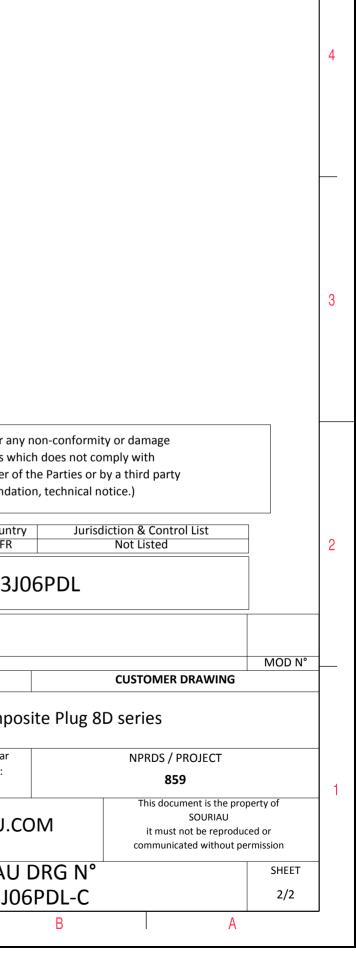

ω