


MPX1D0624LR22

Aliases (UPI2X10624LR22)

KEMET, MPX, Power, 0.22 uH, 20%, 0624(2826)

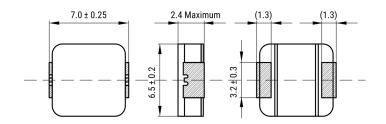

General Information Series MPX Style SMD Chip Size 0624(2826) Description Surface Mount Inductor Features Power Inductors RoHS Yes Core Composite Miscellaneous 40 (K) Temperature Rise Max.

0.22 uH

Clic

Dimensions		
L	7mm +/-0.25mm	
W	6.5mm +/-0.2mm	
Т	2.4mm MAX	
LL	1.3mm NOM	
G	3.2mm +/-0.3mm	

ick here for the 3D model.		Inductance Tolerance	20%	
		Temperature Range	-55/+155°C	
Dimensions		Shielded	Yes	
L	7mm +/-0.25mm		19.4 A (Irms, 40C Rise By Self Heating), 19.5 A	
W	6.5mm +/-0.2mm	Current	(Isat, 20% Drop In Inductance), 29 A (Isat, 30%	
2.4mm MAX			Drop In Inductance)	
LL	1.3mm NOM	DC Resistance	3.3 mOhms	
G	3.2mm +/-0.3mm	Self-Resonant Frequency	120 MHz	

Specifications

Inductance

Packaging Specifications				
Packaging	T&R, 330mm			
Packaging Quantity	1500			

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.