

REV. 0

DCO 170403


COIL: @ 25°C	
RESISTANCE	100 OHMS ± 10%
NOMINAL VOLTAGE	40.0 mADC
MUST OPERATE	20.0 mADC
MUST RELEASE	10.0 mADC MAX, 2.0 mADC MIN

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	15	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES:	OPERATE TIME 15 MS MAX
	RELEASE TIME 10 MS MAX
	CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

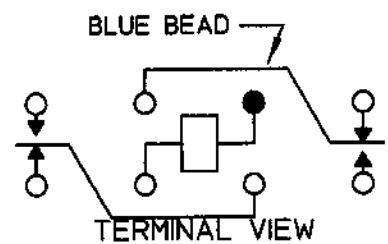

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 2/16/01

CK. TLG 02-16-01

**CII Technologies**  
advanced control electronic solutions

CUST. QPL  
CUST. NO. M5757/13-084 REV. \_\_\_\_\_

3SAT RELAY

3SAT1301A2