


NOTES:

Material
 Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Copper alloy
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Clinch Nut : Brass, Nickel Plated.
 Boardlock : Brass, Tin Plated.
 Screwlock : Steel, Nickel Plated.

Electrical


Contact Resistance : 20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance : 1000
 magohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3AMP
 Volatge Rating : 250 VAC/rms 60Hz
 ⓐ Operating Temperature: -55°C ~+105°C

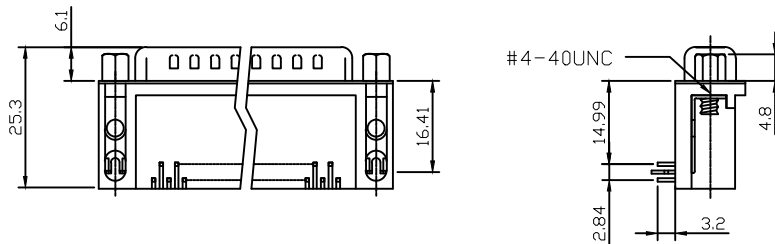

13.84mm Footprint

Dimensions

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

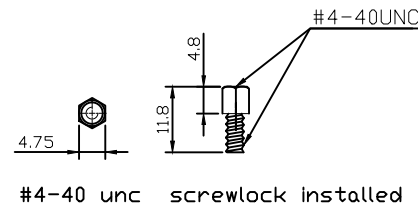

RoHS compliant

Unit:mm

G	Scale	1:1				Date	Name	Description: D-SUB Connector	
	TOLERANCE					Drawn	05.11.2013	Winnie	ASSMANN WSW-No. ADSxxA-KG-TASB5
	X.	±0.38				Approved	23.12.2020	Luca	
X.X	±0.25								
H	X.XX	±0.13							Drawing-No. ASS 6115 CO
	DIM	TOL	①	Add operating temperature	23.12.2020	Luca	ASSMANN WSW components		
	X.°	±3°	②	Drawn	05.11.2013	Winnie			rev01
	X.X°	±1.0°						Customer-No.	Sheet
	Angle	TOL	Id.	Modification	Date	Name			