

SUMMARY

Wires

Low	0
High	0
Coax	2
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

[See video assembly instructions](#)

Series	3B
Termination type	Male solder mixed / multi coax
IP rating	50
Cable Ø	0.00 - 7.00 mm
Status	active
Alternative part	
Matching parts	EEG.3B.846.CLL1

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Variant	Z : Nut for fitting a bend relief
Weight	49.41 g

Performance

Configuration	3B.846 : 2 Coax (50 Ohm), 6 Low V.
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	10 Amps

Specifications

Contact Type: Coaxial 50 Ohm (Crimp) Type C
Max. Matings: 5000
Contact Dia.: 0.7 mm (0.03in)
R (max): 5.8 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Test voltage (kV rms): 0.9

Test voltage (kV dc): 1.3

Others

Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C / 140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [6 ms]

Climatical Category: 50/175/21

Shielding (min): 75 dB (10 MHz)


Shielding (min): 40 dB (1 GHz)

Salt Spray Corrosion: >1000 hr

IP Rating: 50

DRAWINGS

Draws

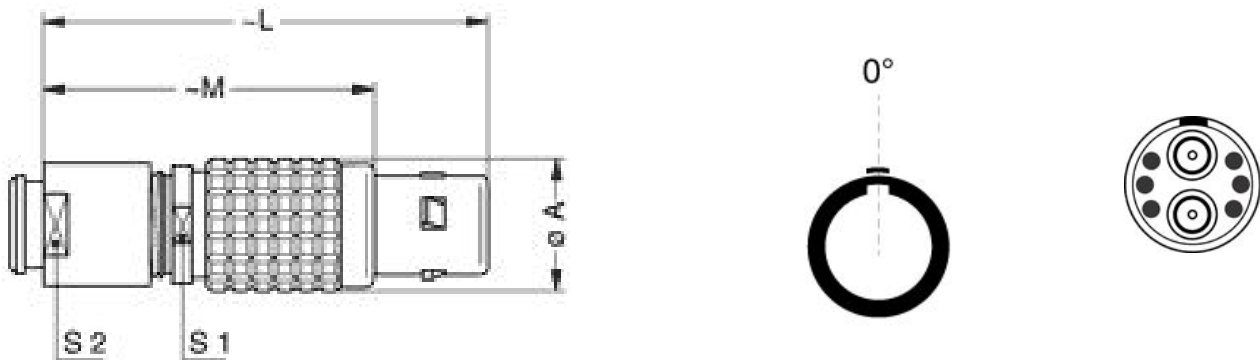

Dimensions

	A	L	M	S1	S2
mm.	18	56.5	41.5	15	15
in.	0,71	2,22	1,63	0,59	0,59

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Extractor: DCC.91.384.5LA
Coax Tool: -
Die Tool: DPE.99.103.8K
Spanner wrench: DCD.3B.040.PA150
Caps: BFG.3B.100.PCSG

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.