




TCA Indust COG HT260C, Ceramic, 4700 pF, 5%, 100 VDC, COG

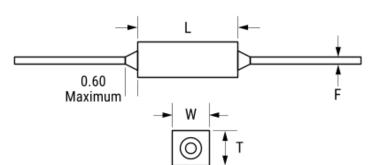

General Information		
Series	TCA Indust COG HT260C	
RoHS	No	
Prop 65	▲ WARNING: Cancer and reproductive harm – http://www.p65warnings.ca.gov.	
Termination	Lead (SnPb)	
Failure Rate	N/A	
AEC-Q200	No	
Notes	Lead Length Shown Is For Parts Supplied In Bulk, See Packaging Specifications For Lead Lengths When Not Provided In Bulk.	

Specifications	
Capacitance	4700 pF
Capacitance Tolerance	5%
Voltage DC	100 VDC
Dielectric Withstanding Voltage	250 VDC
Temperature Range	-55/+260°C
Temperature Coefficient	COG
Dissipation Factor	0.15% 1 kHz 1.0Vrms
Insulation Resistance	100 GOhms

Click here for the 3D model.

Dimensions		7
L	10.16mm MAX	
W	3.81mm MAX	
Т	3.81mm MAX	
LL	3.175mm MIN	
F	0.635mm +/-0.051mm	

Packaging Specifications			
Packaging	Bulk, Bag		
Packaging Quantity	1		

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.