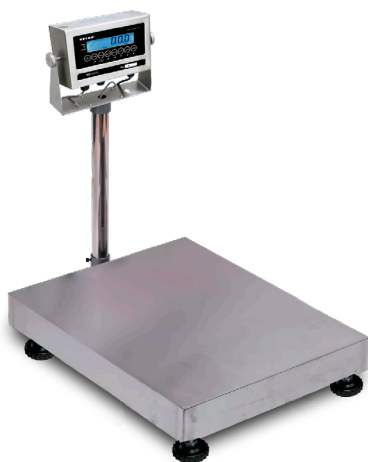


Readability **20 g – 0.05 lb / 50 g – 0.1 lb**

### ► Features

- RS232 interface.
- Internal rechargeable battery.
- Robust stainless steel construction
- High contrast LED display
- Auto shut-off
- Industrial rubber feet

### ► Standard Functions

- Weighing
- Parts counting
- Dynamic weighing
- Checkweighing
- Hold function

### ► Accessories Included

- Power adapter.

### ► TECHNICAL DATA

	VE-WD150L	VE-WD300L
Model	VE-WD150L	VE-WD300L
Capacity	150 kg / 330 lb	300 kg / 660 lb
Readability	20 g / 0.05 lb	50 g / 0.1 lb
Repeatability	±20 g / ±0.05 lb	±50 g / ±0.1 lb
Linearity	±20 g / ±0.05 lb	±50 g / ±0.1 lb
Weighing Units	Kg, lb	
Calibration	External	
Pan Size	450 x 600 mm / 17.7" x 23.6"	
Stabilization Time	2 seconds	
Interface	RS232	
IP Protection	IP 65	
Display	LCD, digit height 25mm / 1"	
Housing	Stainless steel construction	
Operating Environment	-10° to 40°C / 14° to 104°F	
Overall Dimensions	450 x 660 x 125 mm / 17.7"x26"x4.9"	
Power Supply	110/240V, 50/60 Hz AC Adapter and rechargeable battery	
Net Weight	15 kg / 33.1 lb	
Warranty	1 year	