

SPECIFICATION CONTROL DRAWING

55PC6016

TITLE

TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT


Date

1-25-93

Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

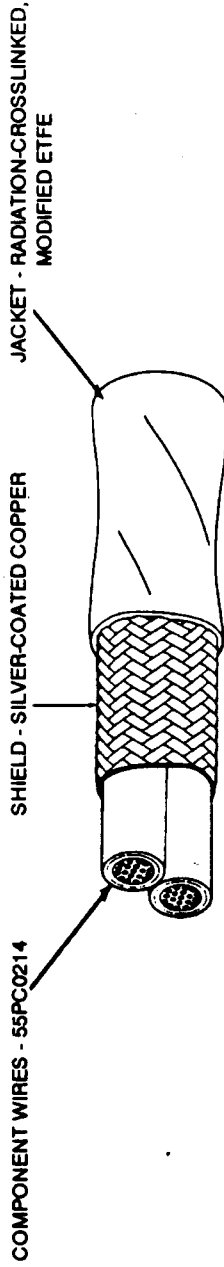

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (\pm .0004)	JACKET THICKNESS (in.)		DIAMETER (in.)		WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	TARGET VALUE	UPPER SPEC LIMIT
			55PC6016-26*	26	.0015	.0060	.0075	.087
55PC6016-24*	24	.0015	.0060	.0075	.097	.102	7.49	8.01
55PC6016-22*	22	.0015	.0060	.0075	.109	.114	9.84	10.48
55PC6016-20*	20	.0015	.0060	.0080	.127	.132	13.63	14.30
55PC6016-18*	18	.0015	.0060	.0080	.146	.151	18.85	19.72
55PC6016-16*	16	.0015	.0060	.0080	.160	.166	23.08	24.07

CONSTRUCTION DETAILS

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 CROSSLINKING PROOF TEST: 300 \pm 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lb/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The *** in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 24, red and blue component wires, white jacket: 55PC6016-24-2/6-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-461.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 (415) 361-3333 TWX 910-373-1728