

Ŧ	G G	п	m	O



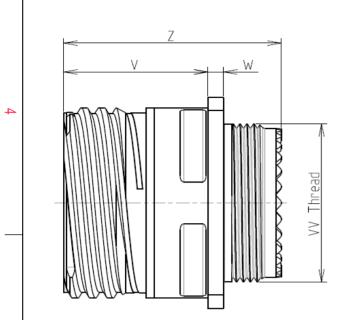

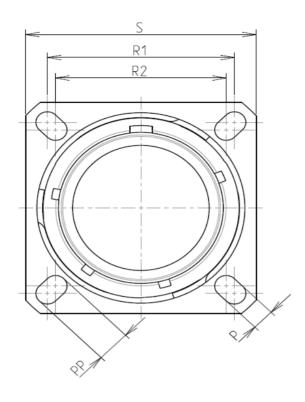

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Stainless Steel	
	-Shell Plating	: Passivated	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
	-Contact Plating	: Gold over copper Alloy 0.8 μm minimum	
	-Durability	: 500 Mating cycles	
	-Delivered without Souriau contacts		
	-Temperature Range	-65°C to +200°C	
	-Salt Spray	: 500 hours	

8D 0

G

13

Κ

03


Ρ


F

А L

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	23.01	
R2	20.62	
S	28.6±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M18x1-6g	

Е



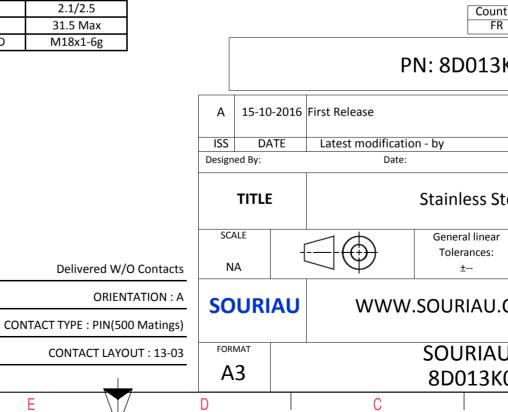

	Φ		A		
					4
S EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third par	ty trol List		2
		CUSTOME	R DRAWING	MOD N°	
Stee	Steel Receptacle 8D series				
ar :			/ PROJECT 359		1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 3PAL-C			SHEET 1/2	
	B		Α		J

03 03 3+16 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 11 10 11 10 11 10 11 10 11 10 12 10 12 10 12 10 13 10 14 10 15 10 16 10 17 10 18 10 19 10 10 10 10 10 10 10 10 10 10 10 10 10 11 10 11 10 12 10 13 10 14 10 15 10 15 10 </th <th>r</th> <th>工</th> <th>۵</th> <th>нг</th> <th>m</th> <th></th> <th>0</th> <th></th>	r	工	۵	н г	m		0	
$3\frac{1}{16}$ $\frac{1}{16}$							SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto
CICC X Y A 2.33 1.47 B 0 -2.79 C -2.39 1.47 C -2.39 1.	4						R1	
C ΔA R1 ØT SOURIAU shall not be liable due to a use of the Prod the Specifications issued by e (professional recomm PN: 8DC A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Stainle: SCALE NA C SCALE		AB	X Y 2.39 1.47 0 -2.79					<u>A</u>
due to a use of the Prod the Specifications issued by e (professional recomm PN: 8DC A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Stainles: SCALE NA General Toleran t=	ω							ØA ØAA R1
Image: Solution of the specifications issued by end (professional recommission) Image: Solution of the specification is sued by end (professional recommission) Image: Solution of the specification of the specificatication of the specification of the specification of the		-				[
A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Stainles: NA General Toleran t-							due to a use of th the Specifications issu	ne Products w led by either c
A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Stainles SCALE General NA Concerning Conc	N							Count FR
→ ISS DATE Latest modification - by Designed By: Date: TITLE Stainles SCALE NA General Toleran ±							PN:	8D013
Designed By: Date: TITLE Stainles SCALE NA General Toleran ±						A 15-1	D-2016 First Release	
SCALE General Toleran ±								ру
NA Toleran ±						TITL	E St	ainless St
SOURIAU WWW.SOURI	<u> </u>							General linear Tolerances: ±
						SOUR	AU WWW.SC)URIAU.(
FORMAT SOUR A3 8D01							S	OURIAL 3D013K
H G F E D C	L	Н	G	F	E	1		

