
THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.







(1)

ORIGINAL









NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

ſ		SW REFERENCE NO.: 630 COMBO ASSEMBLY				
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
[EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
YOUR C	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-2W2-650-1NE		ISSUE	
			PART NUMBER: 630-2W2-	650-1NE	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

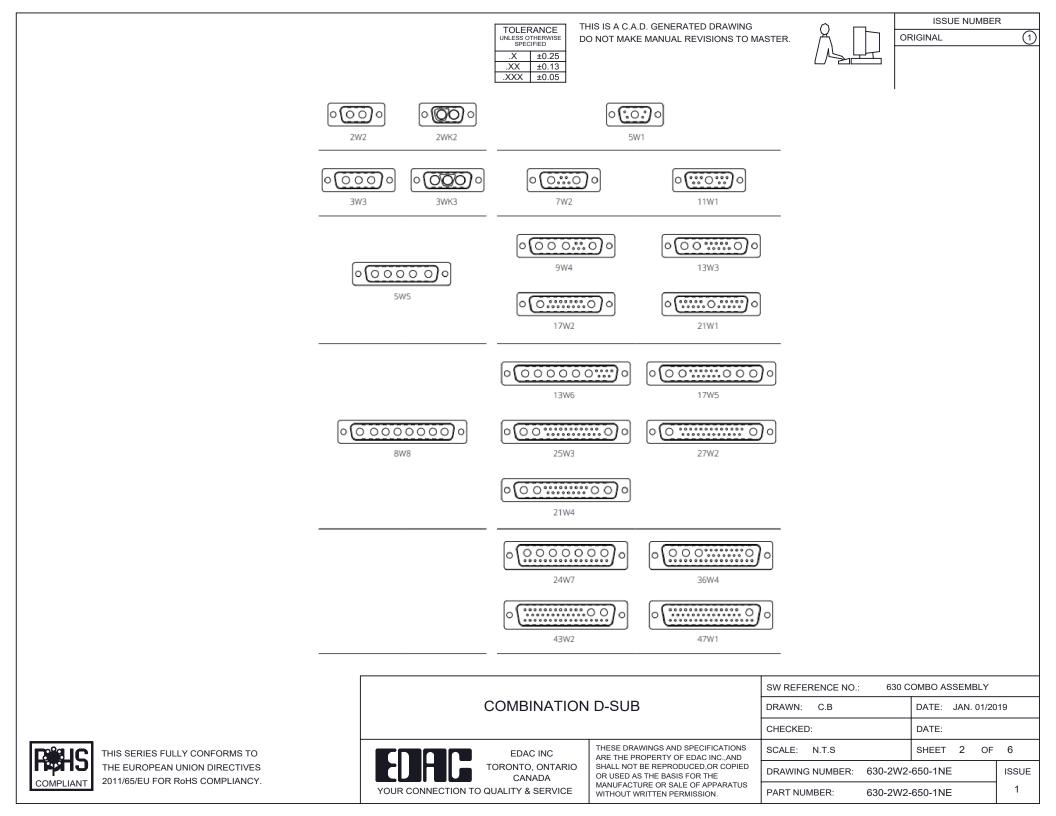



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female






5W5 Male



PCB EDGE

8W8 Male



PCB EDGE






21W4 Male/Female

PCB EDGE

27W2 Male/Female




21W1 Male/Female



		SW REFERENCE NO.: 630 COMBO ASSEMBLY						
	COMBINATION D-SUB		DRAWN: C.B		DATE: 、	JAN. 0'	1/201	9
			CHECKED: DATE:		DATE:	2		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S		SHEET	3	OF	4
5	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER:	ER: 630-2W2-650-1NE			ISSUE	
			PART NUMBER:	630-2W2-	2-650-1NE		1	

5W5 Female


COMPLIANT



8W8 Female


CURRENT RATING / ØA


10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2





PCB EDGE


17W2 Male/Female














PCB EDGE 7W2 Male/Female



TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77


24.77

23.3

PCB EDGE

PCB EDGE

36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female





17W5 Male












20.7

13.72

PCB EDGE



31.75

21.9

61.00 22.18 20.70 20

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY				
			DRAWN: C.B	DATE: JAN. 01/20	19		
			CHECKED:	DATE:			
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: N.T.S	SHEET 4 OF	4		
	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 630-2W2	-650-1NE	ISSUE		
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.			PART NUMBER: 630-2W2	-650-1NE	1		