

<b>T</b>	G	н т – – – – – – – – – – – – – – – – – –	m –	0



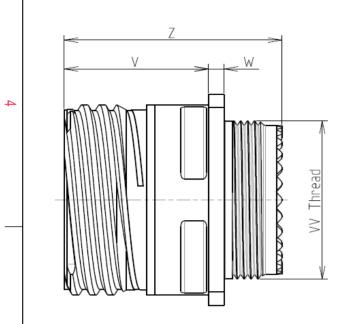

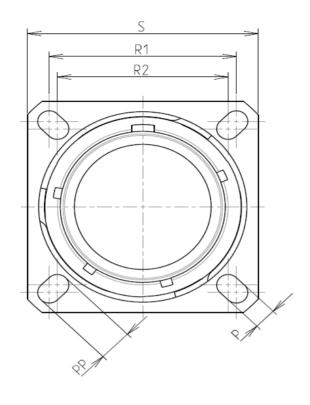

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +200°C			
-Salt Spray	: 48 hours			

8D 0

G

21

-

F

77

А

F

Е


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-77



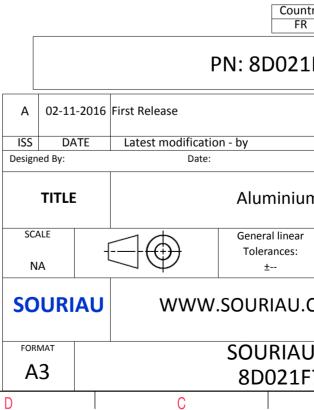

σ		А		
				4
AS EXAMPLE				3
any non-conformit which does not co of the Parties or b ndation, technical n untry Jurisc	mply with by a third part	-		2
1F77AE				2
	CUSTOME		MOD N°	
customer drawing um Receptacle 8D series				
ar		PROJECT 59		1
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° F77AE-C			SHEET	
B		A	_, _	J

	<b>工</b>	۵	<u>п</u>	m	D	0
		Contact Layout				Panel Cutou
4	(	77			22	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		17#22D 2#8 Triax				
		21-77	Г		V	
	Ctc	X Y	1			
	A	1.96 8.38	]			
	В	5.46 7.67	4			Dim
	с	8.51 5.79	4			Dim ØA
ယ	D E	10.46 2.82 10.46 -2.82	-			ØAA R1
	F	10.46 -2.82 8.51 -5.79	-			ØT
	G	5.46 -7.67	1			
	н	1.96 -8.38	]			
	J	0 -5.41				
	K	-1.96 -8.38	4			SOURIAU shall not be liable for any
	L	-5.46 -7.67	-			due to a use of the Products wh
	N	-8.51 -5.79 -10.46 -2.82	-			the Specifications issued by either of (professional recommendati
	P	-10.46 2.82	1			
N	R	-8.51 5.79	]			Country FR
	S	-5.46 7.67				
	Т	-1.96 8.38	4			PN: 8D021F
	U V	-4.57 0	4			
	V	4.57 0			A 02-11-20	016 First Release
	-				ISS DATE Designed By:	E Latest modification - by Date:
					TITLE	Aluminium
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D021F7
	Н	G	F	E	D	C

