



.XX ±0.13 .XXX ±0.05

|--|

ISSUE NUMBER	
ORIGINAL	(1)

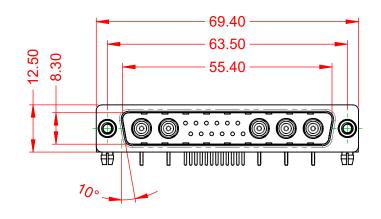




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	50Ω (IMPEDA
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CON
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	$5000M\Omega$ min.

DIELECTRIC WITHSTANDING VOLTAGE:


**OPERATING TEMPERATURE:** 

ANCE)

-55°C ~ 125°C

NTACT

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COME	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19		
			CHECKED:	DATE:			
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-17W	5240-5N5	ISSUE			
YOUR CONNECTION TO QUALITY	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-17W	5240-5N5	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

