


 G	П	m	D	0

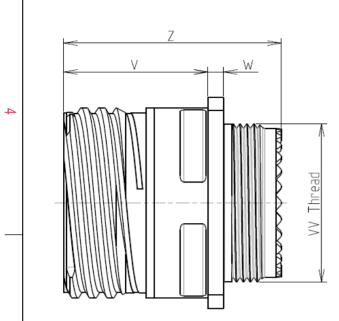

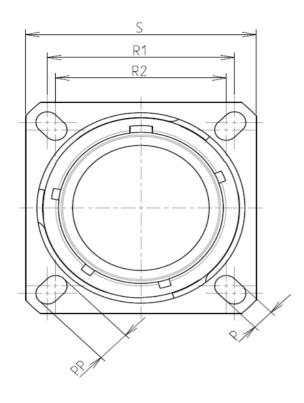



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ω

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 43.5 g ± 10%

8D 0

G

13

Κ

08

S


F

D

Connector	Connector dimension		
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

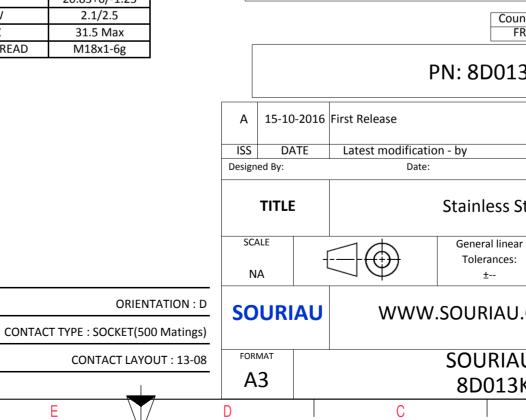

	Φ		А		
					4
AS EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or t on, technical n Jurisc	mply with by a third part			2
	1			MOD N°	
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859				
				perty of	1
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
K0	8SD-C	,		1/2	J
	В		А		

		۵	<del>ار</del> (	m	D	0
		Contact Layout				Panel Cutou
4	×	$ \begin{array}{c} & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		$\begin{array}{c} 0 \\ (mm) $			۲. ۲۳	
ယ		mber of Size Service Contact Supersede ntacts contacts rating location 8 20 I All MS20051-3				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR PN: 8D013k
_	-				A 15-10-2 ISS DATE Designed By:	016 First Release
_					TITLE SCALE NA	Stainless Ste General linear Tolerances: ±
					SOURIA	
		-			FORMAT A3	SOURIAU 8D013K0
	Н	G	F F	E \	D	C

