

<b>—</b>	۵	П	m In the second se	0



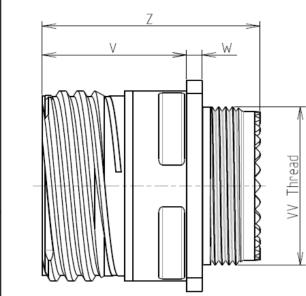

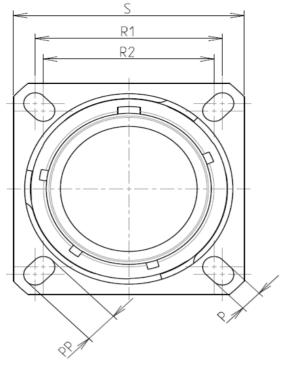

## CHARACTERISTICS

4

ω

 $\sim$ 

\_

-Shell Material	: Aluminium
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +200°C
-Salt Spray	: 48 hours

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g

T   G	т (Г	D	0	₿ >	•	
	S R1 R2 V V V V V V V V V V V V V V V V V V			EXAMPLE		4
CHARACTERISTICS	Keying Shown as example Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III         -Shell Material       : Aluminium         -Shell Plating       : Nickel         -Insulator       : Thermoplastic         -Contacts       : Copper Alloy         -Seals & Grommet       : Silicon Elastomer         -Contact Plating       : Gold over copper Alloy 0.8μm minimum         -Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories	DimNominalP3.25±0.2PP4.93±0.2R126.97R224.61S33.3±0.3V20.83+0/-1.25W2.1/2.5Z31.5 MaxVV THREADM25x1-6g		SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend) Coun FR PN: 8D017	which does not comply with of the Parties or by a third party ation, technical notice.) htry Jurisdiction & Control List Not Listed		2
-Temperature Range <sub>:</sub> -65°C to +200°C -Salt Spray : 48 hours		B 10-04-17 ISS DATE Designed By:	Drawing Update Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	
BASIC SERIES: 8D 0 - 17 F SHELL TYPE : Square Flange Receptacle	22 S D	SCALE NA	Aluminiu General linear Tolerances: ±	m Receptacle 8D series NPRDS / PROJECT 859 This document is the p	roperty of	1
CONTACT TYPE       : Standard Crimp Contact         SHELL SIZE       : 17         PLATING       : F = Nickel	ORIENTATI CONTACT TYPE : SOCKET(500 Ma CONTACT LAYOUT :	atings)	SOURIAL	COM it must not be reprod communicated without	duced or permission SHEET	_
H G I	F E	D A3	8D017F	B A	1/2	

r	τ	۵	г п	m		0	
4		Contact Layout 22				SQUARE FLANGE RECEPT REAR MOUNT	Panel Cut TACLE (TYPE 0)
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel	I for receptacle: Type 0: front m
	+					due to a the Specifica	shall not be liable for a a use of the Products v ations issued by either ofessional recommend
N					B	10-04-17 Drawing Updat DATE Latest modif	
_					Designed	By:	Date: Aluminiu General linear Tolerances: ±
	Н	G	F	E	FORMA A3	т	VW.SOURIAU. SOURIAU 8D017F

