

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

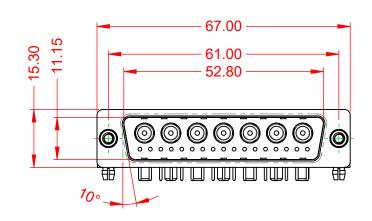




.X ±0.25 .XX ±0.13 .XXX ±0.05

NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms



			SW REFERENCE NO	D.: 629 C	OMBO ASSEMBL	(
COM	COMBINATION D-SUB			COMBINATION D-SUB		DRAWN: C.B		DATE: JAN. 01	/2019
			CHECKED:		DATE:				
	EDAC INC ARE THE P TORONTO, ONTARIO CANADA OR USED A		SCALE: (IN C.A.D	0. 1:1)	SHEET 1 (DF 2			
			DRAWING NUMBER: 629-24W7640-3N5		ISSUE				
YOUR CONNECTION TO QUALIT	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER:	629-24W	7640-3N5	1			



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

