



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	1

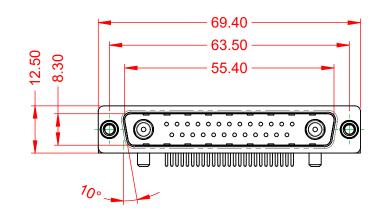



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

10.67 Θ 13.20

С	PERATING TEMPERATURE:	-55°C ~ 125°C
	OWER/CO-AX CONTACT RATING: F PRESENT)	30A (CURRENT)
_	IGNAL CONTACT CURRENT RATING: IGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
	NSULATOR RESISTANCE:	$5000M\Omega$ min.

WITHSTANDING VOLTAGE:

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	TORONTO, ONTARIO CANADA	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-27W2240-31E		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-27W	2240-3TE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

