




.XX ±0.13 .XXX ±0.05


| _ |        |
|---|--------|
|   | ORIGIN |
|   |        |



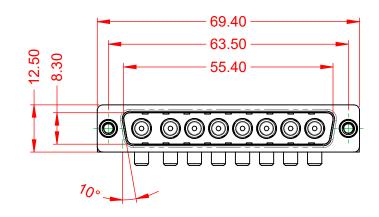



NOTES: MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, 30µ" GOLD PLATED **OPERATING TEMPERATURE:** -55°C ~ 125°C (CURRENT) PER CONTACT ηΩ ΜΑΧ. Θ 0MΩ min.  $\bigcirc$ 6 0 0  $\cap$ 

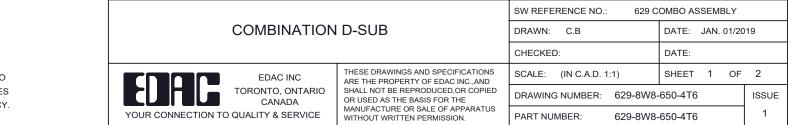



10.67

20.33

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

|                                       | POWER/CO-AX CONTACT RATING:<br>(IF PRESENT)                  | 40A (CURREN              |
|---------------------------------------|--|--------------------------|
|                                       | SIGNAL CONTACT CURRENT RATING:<br>SIGNAL CONTACT RESISTANCE: | 5A PER CONT<br>10mΩ MAX. |
|                                       | INSULATOR RESISTANCE:  | 5000MΩ min.              |
| $\bigcirc \bigcirc \bigcirc \bigcirc$ | DIELECTRIC<br>WITHSTANDING VOLTAGE:                          | 1000V AC rms             |

