

DESCRIPTION: 96 POSITION - 64 PIN - DIN - FEMALE - IDC



MATERIAL:

INSULATOR: GLASS FILLED PBT
 UL RATED 94V-0
 230°C PROCESS TEMPERATURE
 CONTACTS: COPPER ALLOY
 DOUBLE SPRING HARDENED
 GOLD PLATED MATING AREA
 TIN ON TAILS


ELECTRICAL:

CURRENT RATING: 1 AMP Max. FOR 28AWG
 1.5 AMP Max. FOR 26AWG
 OPERATING TEMPERATURE: -40°C TO +145°C


STRAIN RELIEF SOLD SEPARATELY
 PART NUMBER 164-096-001L000

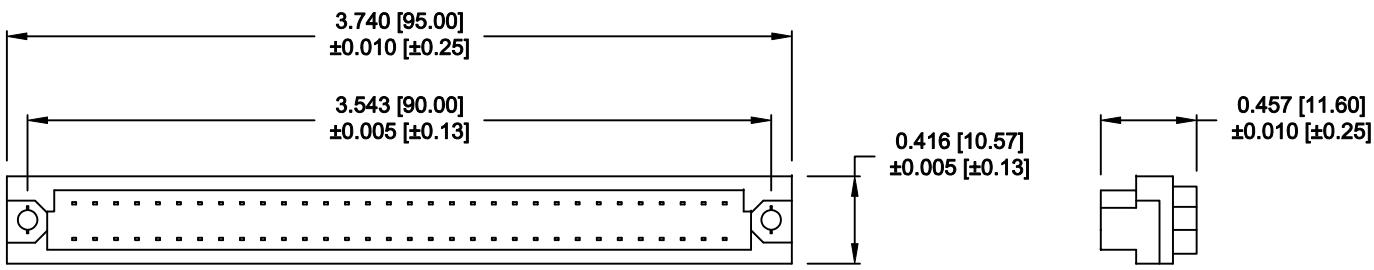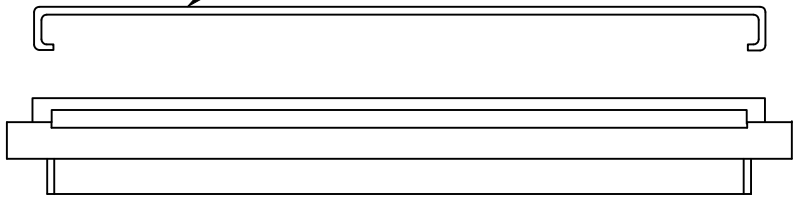

689-096-290L001

096 POSITION = 
 ROWS A & C LOADED
 TOTAL 64 CONTACTS

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 04-08-09
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: 1 : 1	SHEET 1 OF 1	REV 0
		DWG NO. 689-096-290L001		

RoHS COMPLIANT