
т	۵ D	н т		0





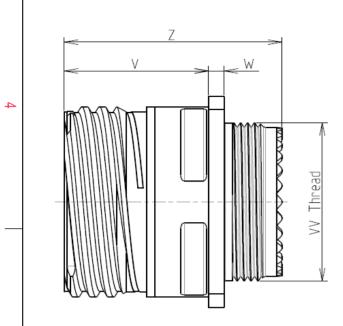

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 14.89 g ± 10%

8D 0

G

11

F

04

В

F

D

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : D

CONTACT LAYOUT : 11-04

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

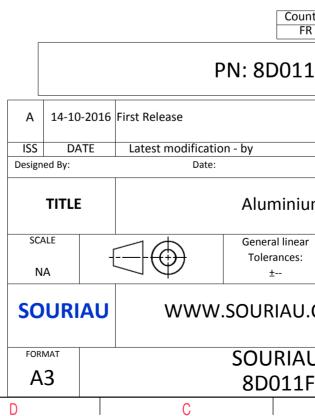

	Φ		A		_
					4
AS EXA	AMPLE				3
s whic er of t	non-conformit ch does not co che Parties or t on, technical no	mply with by a third par			
FR	Julisu	Not Listed]	2
1F(04BD				
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar :			PROJECT		
J.CC	859 This document is the property of SOURIAU it must not be reproduced or				1
	communicated without permission				
	DRG N° 4BD-C			SHEET 1/2	
	B		A		J

-	Ŧ	۵	п П	m	D	O
		Contact Layout				Panel Cutou
4	-x_	$ \begin{array}{c} $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Num size no. cont 11 -4 4	V-axis (mm) Y-axis (mm) + 0.65 (1.65) .065 (1.65) + 0.65 (1.65) .065 (1.65) - 0.65 (1.65) .065 (1.65)				ØT ØA
ω						Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
					A 14-10-20 ISS DATE	PN: 8D011F
					Designed By: TITLE SCALE	Date: Aluminium
<u> </u>					NA SOURIA	General linear Tolerances: ±
			-		FORMAT A3	SOURIAU 8D011F0
	Н	l G	F	E \	D	C I

