

I	<u>م</u>	п	m	<u>о</u>



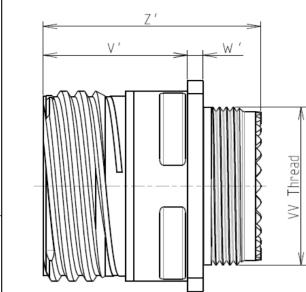

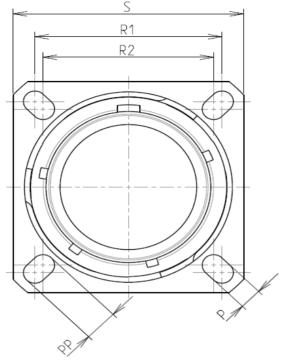

## CHARACTERISTICS

4

ω

 $\sim$ 

\_

_	_	
	-Shell Material	: Composite
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimu
	-Durability	: 500 Mating cycles
	-Delivered with Souriau	contacts and Accessories
	-Temperature Range	65°C to +200°C

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M18x1-6g			

т р т	П	D	0	8		
	S R1 R2 Q		<image/> <image/>	MMPLE		4
	vn as example					
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal					
-Shell Material: Composite-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	P         3.25±0.2           PP         4.93±0.2           R1         23.01           R2         20.62           S         28.6±0.3           V'         19.5+1.4/-0           W'         2.1/3.65		SOURIAU shall not be liable for any i due to a use of the Products whic the Specifications issued by either of t (professional recommendatio Country	h does not comply with he Parties or by a third party n, technical notice.) Jurisdiction & Control List		
-Contact Plating       : Gold over copper Alloy 0.8μm minimum         -Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories	Z' 32 Max VV THREAD M18x1-6g	FR   Not Listed     PN: 8D013M04JE				2
-Temperature Range -65°C to +200°C		A 15-10-2016	First Release			-
-Salt Spray : 2000 hours		ISS DATE	Latest modification - by		MOD N°	
		Designed By:	Date: Composite	customer drawing Receptacle 8D series		-
BASIC SERIES:     8D     0     -     13     M     04     J     E       SHELL TYPE     : Square Flange Receptacle     -     13     M     04     J     E		SCALE .	General linear Tolerances:	NPRDS / PROJECT <b>859</b>		-
CONTACT TYPE     : Standard Crimp Contact       SHELL SIZE : 13	CONTACT TYPE : SOCKET (1500 Matings	-   SUURIAU	WWW.SOURIAU.CC	This document is the pr SOURIAU it must not be reproduced communicated without p	uced or	
PLATING : M = Nickel	CONTACT LAYOUT : 13-04		SOURIAU I	DRG N°	SHEET	-
		A3	8D013M0		1/2	
H G F	E	D	C	BAA		

		ര	וד	m		C	
		Contact Layout					Panel Cutout
4	.x	$ \begin{array}{c}                                     $			۲ – ۲	SQUARE FLANGE RECEPTACLE (TYP REAR MOUNTING	PE 0)
	A B C D Shell Arrangement N size no. c 13 -4	+.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00)083 (2.11) 146 (3.71) +.035 (0.89)			<u>v</u>		ØA
ى نى							ØA ØAA R1 ØT
	+					the Specifications is	the Products whi
Q					A 15-10-20	PN 16 First Release	J: 8D013N
					ISS DATE Designed By:	Latest modification - Date:	
-					SCALE NA		General linear Tolerances: ±
					FORMAT		OURIAU.C
l	Н	G	F	E	A3 D	С	8D013M
					V		

