

Product Brief



ANT-5GWWS2-SMA Cellular Sub-6 5G Antenna

The 5GWWS2 is a dipole, blade-style antenna for 5G New Radio, LTE, and cellular IoT (LTE-M, NB-IoT) applications. As a 5G NR antenna, the 5GWWS2 performs in the 617 MHz to 960 MHz low band, and excels in the 2496 MHz to 2690 MHz and 3300 MHz to 5000 MHz ranges for CBRS private networking, 4.9 GHz public safety and emerging 2.5 GHz and C-band applications.

The hinged design allows for the antenna to be positioned for optimum performance and reduces the potential for damage from impact compared to a fixed whip design. The antenna attaches with an SMA plug (male pin) connector.



Features

- Performance at 3.55 GHz to 3.7 GHz (CBRS)
 - VSWR: ≤ 2.1
 - Peak Gain: 5.6 dBi
 - Efficiency: 65%
- Performance at 4.94 GHz to 4.99 GHz
 - VSWR: ≤ 1.9
 - Peak Gain: 3.6 dBi
 - Efficiency: 69%
- Hinged design with detents for straight, 45 degree and 90 degree positioning
- SMA plug (male pin)

Applications

- Worldwide 5G/4G/3G/2G
- Cellular IoT: LTE-M (Cat-M1) and NB-IoT
- Private cellular networks
 - Citizens Broadband Radio Service (CBRS)
- 4.9 GHz Public Safety
- Emerging 5G C-Band applications
- Emerging 5G 2.5 GHz EBS applications
- 2.4 GHz ISM applications
 - Bluetooth®
 - ZigBee®
- Internet of Things (IoT) devices

Ordering Information

Part Number	Description
ANT-5GWWS2-SMA	Cellular 5G blade-style antenna with SMA plug (male pin)

Available from Linx Technologies and select distributors and representatives.

Electrical Specifications

ANT-5GWWS2	Frequency Range	VSWR (max.)	Peak Gain (dBi)	Avg. Gain (dBi)	Efficiency (%)
LTE 71	617 MHz to 698 MHz	4.0	0.6	-3.1	53
LTE 12, 13, 14, 17, 26, 28, 29	698 MHz to 803 MHz	3.3	-0.1	-4.1	43
LTE 5, 8, 20	791 MHz to 960 MHz	3.5	0.5	-5.6	43
LTE 1, 2, 3, 4, 25, 66	1710 MHz to 2200 MHz	2.5	3.3	-2.3	62
LTE 30, 40	2300 MHz to 2400 MHz	2.4	2.7	-1.8	68
ISM	2400 MHz to 2485 MHz	1.7	2.7	-1.9	69
LTE 7, 41	2496 MHz to 2690 MHz	2.0	1.6	-1.4	77
LTE 22, 42, 43, 48, 49, 52	3300 MHz to 3800 MHz	2.2	4.0	-2.2	63
GPS/GNSS	1553 MHz to 1609 MHz	1.5	2.4	-2.2	63
CBRS	3550 MHz to 3700 MHz	2.1	5.6	-2.1	65
C-Band	3700 MHz to 4200 MHz	2.4	3.7	-2.8	57
Public Safety	4940 MHz to 4990 MHz	1.9	3.6	-1.7	69
Polarization	Linear	Impedance		50 Ω	
Radiation	Omnidirectional	Connection		SMA plug (male pin)	
Max Power	5 W	Electrical Type		Dipole	
Wavelength	1/2-wave	Operating Temp. Range		-20 °C to +65 °C	
Weight	38.0 g (1.34 oz)				
Dimensions	186.0 mm x 37.0 mm x 13.0 (7.32 in x 1.46 in x 0.51 in)				

Electrical specifications and plots measured with the antenna in a straight orientation.

VSWR

Figure 1 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

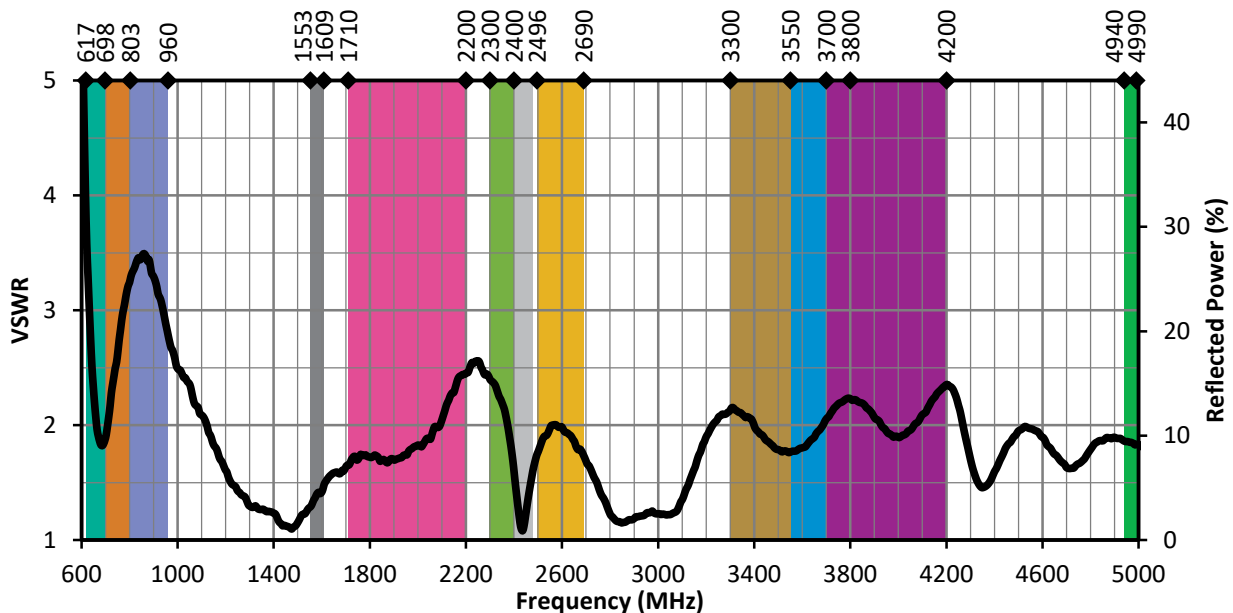


Figure 1. ANT-5GWWS2-SMA VSWR, Straight

Website: <http://linxtechnologies.com> • Phone: +1 (541) 471-6256 • E-MAIL: info@linxtechnologies.com • Linx Offices: 159 Ort Lane, Merlin, OR, US 97532

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Bluetooth is a registered trademark of Bluetooth SIG, Inc. ZigBee is a registered trademark of ZigBee Alliance, Inc. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies. All Rights Reserved.

