

Contact Detail:

500-Wire Hole .110x.024(2.79x0.61) - Tail

LG.=.245(6.22)







Features

- **UL** Recognized
- .150 (3.81) Contact Spacing x .130 (3.30) or .150 (3.81) Row Spacing with Staggered Grid
- Plug and Receptacle in 14 or 36 Contact Sizes
- Edacon Hermaphroditic Contact Mating Design
- Contact Termination Options Include: Crimp, P.C. Tail, Wire Hole and Wire Wrap
- Mating and Unmating Simplified with use of Actuating Screws
- Optional Covers with Side or Top Entry Cable Clamp in Plastic or Metal Material Available for All Connector Sizes
- Versatile Metal Cover Design Permits Assembly and Disassembly after Cabling is Complete plus Cable Entry Style Flexibility
- Actuating Screws, Locknuts, Polarizing Hardware, Covers and Contacts Suitable for either Plug or Receptacle
- Polarizing Hardware Adjustable for 288 Mating Combinations
- Tools Available for Contact Installation, Removal and Crimping and Polarizing Changes

Specifications

- Insulator Material:Polycarbonate, Colour: Grev
 - Contact Material: Phosphor Bronze Alloy CA-510
- Contact Plating: Gold over Nickel for Entire Contact
- Cover Material: Polycarbonate, Colour: Green, or Die-
- Cast Zinc, Finished with Grey Enamel Paint
- Current Rating: 8.5 Amperes
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 2000 V AC rms at Sea Level
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +125 Degrees C
- Insertion and Withdrawal Force: 2 to 16 oz (0.56 to

4.45 N) per Contact Position

See Accompanying Pages for:

- PC Tail Layout
- Cutout Panel Details
- Cover Details

519 Assembly Part Number: 519-014-500-412



CANADA


YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. 519 Assembly DATE: JUNE 18, 2009 J.LEE 1:1 SHEET 1 OF 4


519 Assembly

DRIGINAL



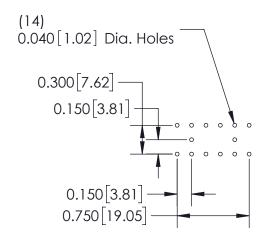

14 Pin P.C. Tail Layout

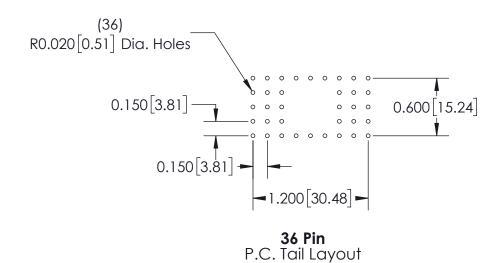

519 Assembly
P.C. Tail Layout Details

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITE OR PERMISSION.

ACAD REFERENCE NO. 519 Assembly
DRAWN: J.LEE
DATE:
DATE:

SCALE: 1:1

CALE:
DATE:

SCALE: 1:1

DRAWING NUMBER
SISSUE
TOROWNOR SALE OF APPARATUS
SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS
TO ASSEMBLY

DATE:

SCALE: 1:1

DRAWING NUMBER
SISSUE
519 Assembly


1

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

DRIGINAL

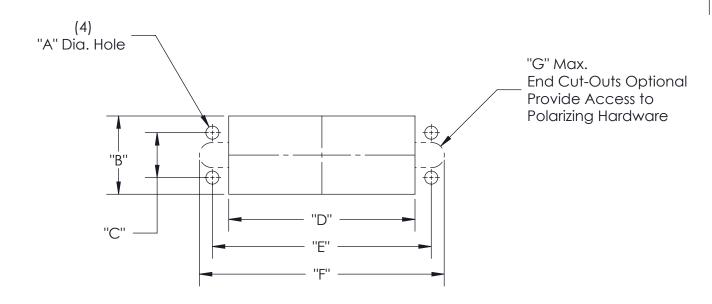

| | Dimension A | Dimension B | Dimension C | Dimension D | Dimension E | Dimension F | Dimension G |
|--------|--------------|---------------|---------------|---------------|---------------|--------------|----------------|
| 14 Pin | 0.104 [2.64] | 0.640 [16.26] | 0.410 [10.41] | 0.960 [24.38] | 1.126 [28.60] | 1.32 [33.53] | R0.130 [R3.30] |
| 36 Pin | 0.136 [3.45] | 0.816 [20.73] | 0.468 [11.89] | 1.420 [36.07] | 1.688 [42.88] | 1.96 [49.78] | R0.130 [R3.30] |

| 519 Assembly | ACAD REFERENC | CAD REFERENCE NO. 519 Assembly | | | |
|--------------------------------------|--|--------------------------------|-----------|-------------|--------|
| , | DRAWN: J.LEE | E | DATE: JUN | IE 18, 2009 | |
| Cut-Out Panel Detail | CHECKED: | | DATE: | | |
| EDAC INC | THESE DRAWINGS AND SPECIFICATIONS | SCALE: | | SHEET : | 3 OF 4 |
| I SII II GI TORONIO, ONIARIO | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBE | ER | | ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS | 519 Assemb | ly | | 1 |

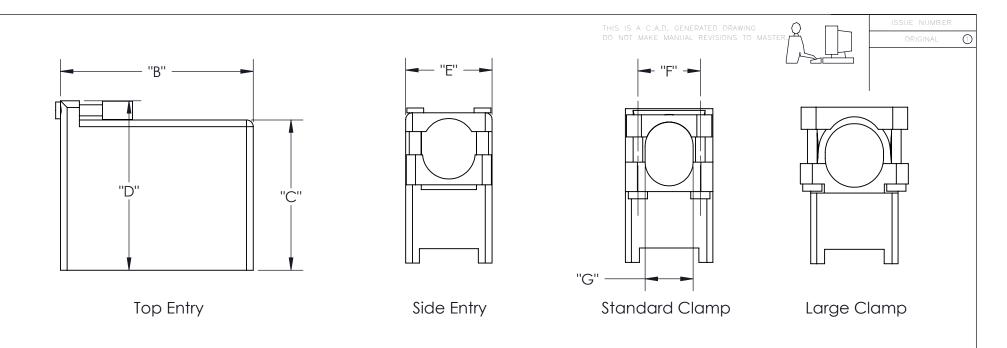

| Cover for Connector | Cover Material | Clamp Size | "A" | "B" | "C" | "D" | "E" | "F" | "G" |
|------------------------|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 14 Pin | Plastic | Standard | 1.605 (40.77) | 1.325 (33.66) | 0.906 (23.01) | 1.190 (30.23) | 0.715 (18.16) | 0.450 (11.43) | 0.450 (11.43) |
| 14 Pin | Metal | Standard | 1.539 (39.09) | 1.325 (33.66) | 0.906 (23.01) | 1.120 (28.45) | 0.686 (17.42) | 0.446 (11.33) | 0.490 (12.45) |
| 36 Pin | Plastic | Standard | 2.460 (62.48) | 2.010 (51.05) | 1.530 (38.86) | 1.985 (50.42) | 0.910 (23.11) | 0.650 (16.51) | 0.500 (12.70) |
| 36 Pin | Plastic | Large | 2.460 (62.48) | 2.010 (51.05) | 1.530 (38.86) | 1.985 (50.42) | 1.110 (28.19) | 0.650 (16.51) | 0.608 (15.44) |
| 36 Pin | Metal | Standard | 2.206 (56.03) | 2.006 (50.95) | 1.566 (39.78) | 1.766 (44.86) | 0.875 (22.23) | 0.720 (18.29) | 0.575 (14.61) |

| 519 Assem | ACAD REFERENCE NO. 519 Assembly | | | | | | | |
|----------------------------------|---------------------------------|--|-----------|--------|-----------|----------------------------|--|--|
| Cut-Out Panel Detail | | | DRAWN: | J.LEE | DATE: JUN | DATE: JUNE 18, 2009 | | |
| | | | CHECKED: | | DATE: | | | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS | SCALE: | | SHEET . | 4 OF 4 | | |
| I S I G TORONTO, ONTARIO | | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING 1 | NUMBER | | ISSUE | | |
| YOUR CONNECTION | CANADA TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS | 519 Ass | sembly | | 1 | | |