



Å

ISSUE NUMBER	
ORIGINAL	

(1)

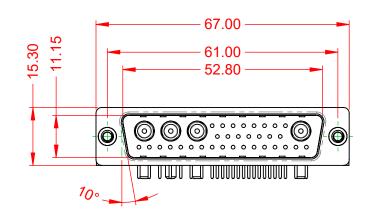




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTAC [®] 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION D-SUB DRAWN: C.B		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
0	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
ES CY.		OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-36W4250-2TC		ISSUE
		PART NUMBER: 629-36W	4250-2TC	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY

COMPLIANT

-55°C ~ 125°C Т

1000V AC rms

