
<u>م</u>		т	m	D	0	œ		
	ØS-							
					LAYOUT SE	HOWN AS EXAMPLE		
		Keying Shown as example						
CHARACTERISTICS			]					
-Standard : Based on MIL-DTL-38999 Series III		Dim	ctor dimension Nominal					
-Shell Material : Composite		ØS	35.7 Max			:		-
-Shell Plating : Without Plating		Z VV THREAI	31 Max M25x1-6g			iable for any non-conformit Products which does not co		
-Insulator : Thermoplastic						by either of the Parties or b		
-Contacts : Copper Alloy					(professional rec	commendation, technical no	otice.)	
-Seals & Grommet : Silicon Elastomer						Country	iction & Control List	
-Contact Plating : Gold over copper Allo	y 0.8µm minimum					Country Jurisd FR	Not Listed	
-Durability : 500 Mating cycles	, .			FR Not Listed				
-Delivered with Souriau contacts and Accessorie	25			PN: 8D517X08BC				
-Temperature Range <u>-</u> -65°C to +175°C								
-Salt Spray : 2000 hours				A 18-10-20	016 First Release			
				ISS DATE	Latest modification - by		MOD	) N°
				Designed By:	Date:		CUSTOMER DRAWING	
				TITLE		Composite Plug 8	g 8D series	
BASIC SERIES: 8D 5	- 17 X 08	вС		SCALE	Gen	neral linear	NPRDS / PROJECT	
	- 1/ X 08					lerances:	859	
SHELL TYPE : Plug with RFI Shielding				NA		±	This document is the property of	
CONTACT TYPE : Standard Crimp Contact			ORIENTATION : C	SOURIA	U WWW.SOU	IRIAU.COM	SOURIAU it must not be reproduced or	
SHELL SIZE : 17		CO	ITACT TYPE : SOCKET(500 Matings)				communicated without permission	
PLATING : X = Without Plating CONTACT LAYOUT : 17-08			FORMAT	SO	URIAU DRG N°	SHE	ET	
			I	A3	וא	D517X08BC-C	1/2	2

_	т	۵	וד	m		0	
		Contact Layout					
4	-х (	$ \begin{array}{c}                                     $					
	Conta position A B C C D E F	Contacts           Location           Y-axis           (mm)         (mm)           +.000 (0.00)         +.236 (5.99)           +.128 (3.25)         +.086 (2.18)           +.230 (5.84)        078 (1.98)           +.094 (2.39)        216 (5.49)					
ယ	G H Shell Arrangement Nun size no. cor	128 (3.25) +.086 (2.18)					
	_						
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe (professional recommer	s w er c
N						PN: 8D51	
					A 18-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:	
					TITLE	Com	p
_					SCALE NA	General linea Tolerances:	
					SOURIA	U WWW.SOURIAL	J.(
				_	FORMAT A3	SOURIA 8D517	
L	Н	G	F	E	D	C	

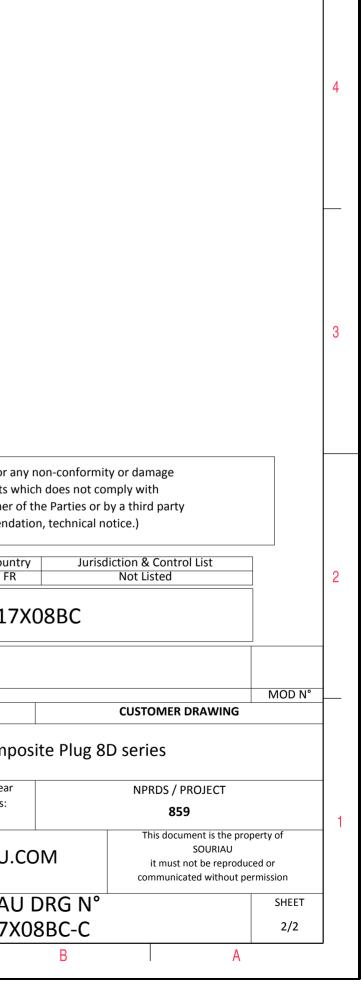

 $\triangleright$ 

σ