
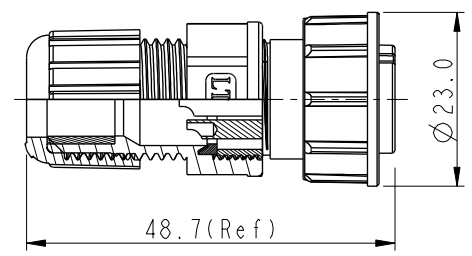
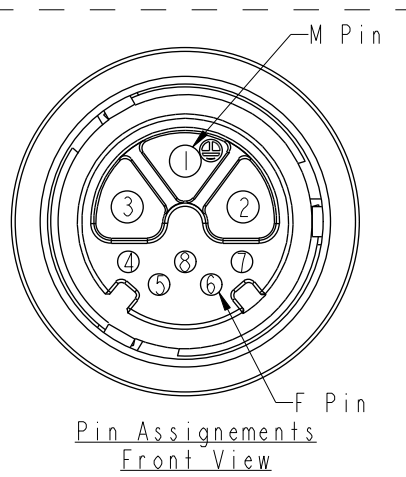




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2011/07/26	Kevin Wang	
B	LEN1350052	2013/04/24	Ruru	Modify Cable OD Max

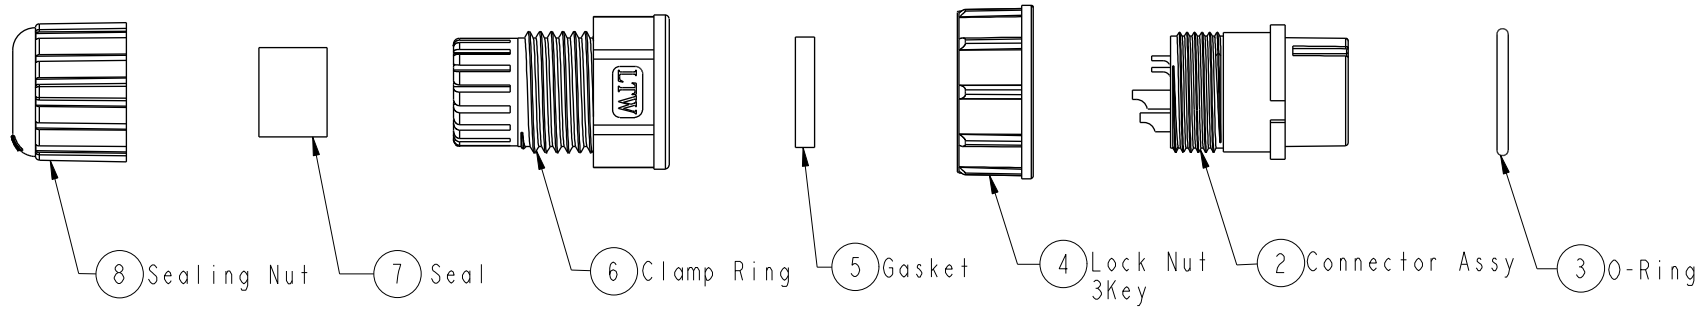

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * O-Ring: EPDM, Black
 - * Lock Nut: Nylon+GF, Black
 - * Gasket: Silicone, Black
 - * Clamp Ring: Nylon, Black
 - * Seal: EPDM, Black
 - * Sealing Nut: Nylon, Black
 - * $\triangle B$ Cable OD Max : $\varnothing 7.6 \sim \varnothing 9.6$ mm

UNIT:mm		TITLE HyBrid Assy., Middle, 3Key 3MPin(10A)+5FPin(2A)		ITEM NO. CBU-08BFEA-TL7001		DRAWN BY Ruru		DATE 2013-05-06			
		SCALE 1:1		SIZE A4		DWG NO. CBU-08BFEA-TL7001		CHECKED BY Rita		DATE 2013-05-06	
		REV. B		WC-REV. B.1		CUSTOMER ALTW		APPROVED BY Maslow		DATE 2013-05-06	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SHEET 1 OF 1		\varnothing : Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司