

Feed-through terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Yellow

RAL: 1026

Business data

Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	13.4 g
Weight per piece (including packaging)	14.43 g
Unit of weight	G
Customs number	85369010
Country of origin	BG
Prio-Article	3212.2
Product description	Feed-through terminal

Technical data

Dimensions

Length	77.7 mm
Width	5.1 mm
Height	42.3 mm
Height TS 35/7.5	43 mm

Ratings

Rated voltage	800 V
Rated current	24 A
Rated cross-section	2.5 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	0.77 W

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	4
Number of terminals per level	4
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	12
Stripping length	12 mm

3212.8

FRK 2,5/4A YE

Technical data

Materials

Insulation housing	Polyamide 6.6, Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	2
End plate required	✓

Print

Colour	Yellow
--------	--------

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
EAC approval granted	yes

CSA approval

CSA approval	C22.2 No 158
CSA approval granted	yes
CSA Usegroup C: rated voltage	600 V
CSA Usegroup C: rated current	21 A
CSA wire cross-section AWG, min.	26
CSA wire cross-section AWG, max.	12
CSA stripping length	12 mm

CSAus approval

CSAus approval	UL 1059
CSAus approval granted	yes
CSAus Usegroup C: rated voltage	600 V
CSAus Usegroup C: rated current	21 A
CSAus wire cross-section AWG, min.	26
CSAus wire cross-section AWG, max.	12
CSAus stripping length	12 mm


KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	800 V
KEMA rated current	24 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²


3212.8

FRK 2,5/4A YE

Media

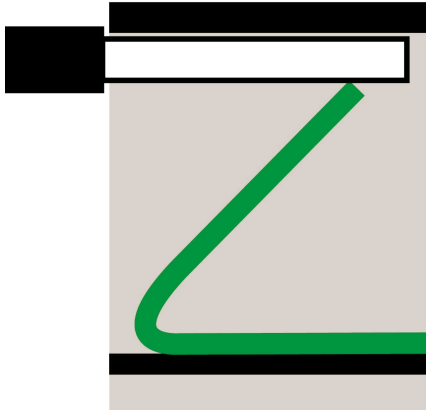

EAC

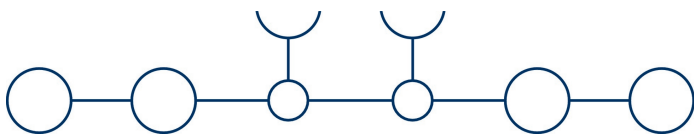

3212.8

FRK 2,5/4A YE

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3412.2	FAP 2,5/4A BG	4044211110468	20

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2 BG	4044211080600	50

3212.8

FRK 2,5/4A YE

Accessories

Insulated cross-connector



Insulated cross-connector, No. of poles: 8,
Mounting type: Plug in, Width: 40.7 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3468.8	FQI 2,5/8 YE	4044211110796	10



Insulated cross-connector, No. of poles: 9,
Mounting type: Plug in, Width: 45.8 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3469.8	FQI 2,5/9 YE	4044211110802	10



Insulated cross-connector, No. of poles: 7,
Mounting type: Plug in, Width: 35.6 mm,
Colour: Yellow

General order data

Product number:	Article name	Creation date 12.03.2022 05:23:34 Subject to technical changes	GTIN (EAN)	Packaging unit
3467.8	FQI 2,5/7 YE		4044211110789	20

3212.8

FRK 2,5/4A YE

Accessories

Insulated cross-connector



Insulated cross-connector, No. of poles: 4,
Mounting type: Plug in, Width: 20.3 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3464.8	FQI 2,5/4 YE	4044211110758	20



Insulated cross-connector, No. of poles: 5,
Mounting type: Plug in, Width: 25.4 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3465.8	FQI 2,5/5 YE	4044211110765	20



Insulated cross-connector, No. of poles: 6,
Mounting type: Plug in, Width: 30.5 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3466.8	FQI 2,5/6 YE	4044211110772	20

Creation date 12.03.2022 05:23:34
Subject to technical changes

3212.8

FRK 2,5/4A YE

Accessories

Insulated cross-connector



Insulated cross-connector, No. of poles: 10,
Mounting type: Plug in, Width: 50.9 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3460.8	FQI 2,5/10 YE	4044211110727	10



Insulated cross-connector, No. of poles: 3,
Mounting type: Plug in, Width: 15.2 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3463.8	FQI 2,5/3 YE	4044211110741	50



Insulated cross-connector, No. of poles: 2,
Mounting type: Plug in, Width: 10.1 mm,
Colour: Yellow

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3462.8	FQI 2,5/2 YE	4044211110734	50


Creation date 12.03.2022 05:23:34
Subject to technical changes

3212.8

FRK 2,5/4A YE

Accessories

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 ST

Four-way cover

Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow



General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
3426.8	FAD 2,5/4/B YE	4044211132934	20 ST
