


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------------------|-----------|-----|------|
| | A | INITIAL RELEASE | 10DEC2014 | MB | SB |
| | B | REVISED PER ECR-15-003647 | 05MAR2015 | MM | SB |
| | | | | | |

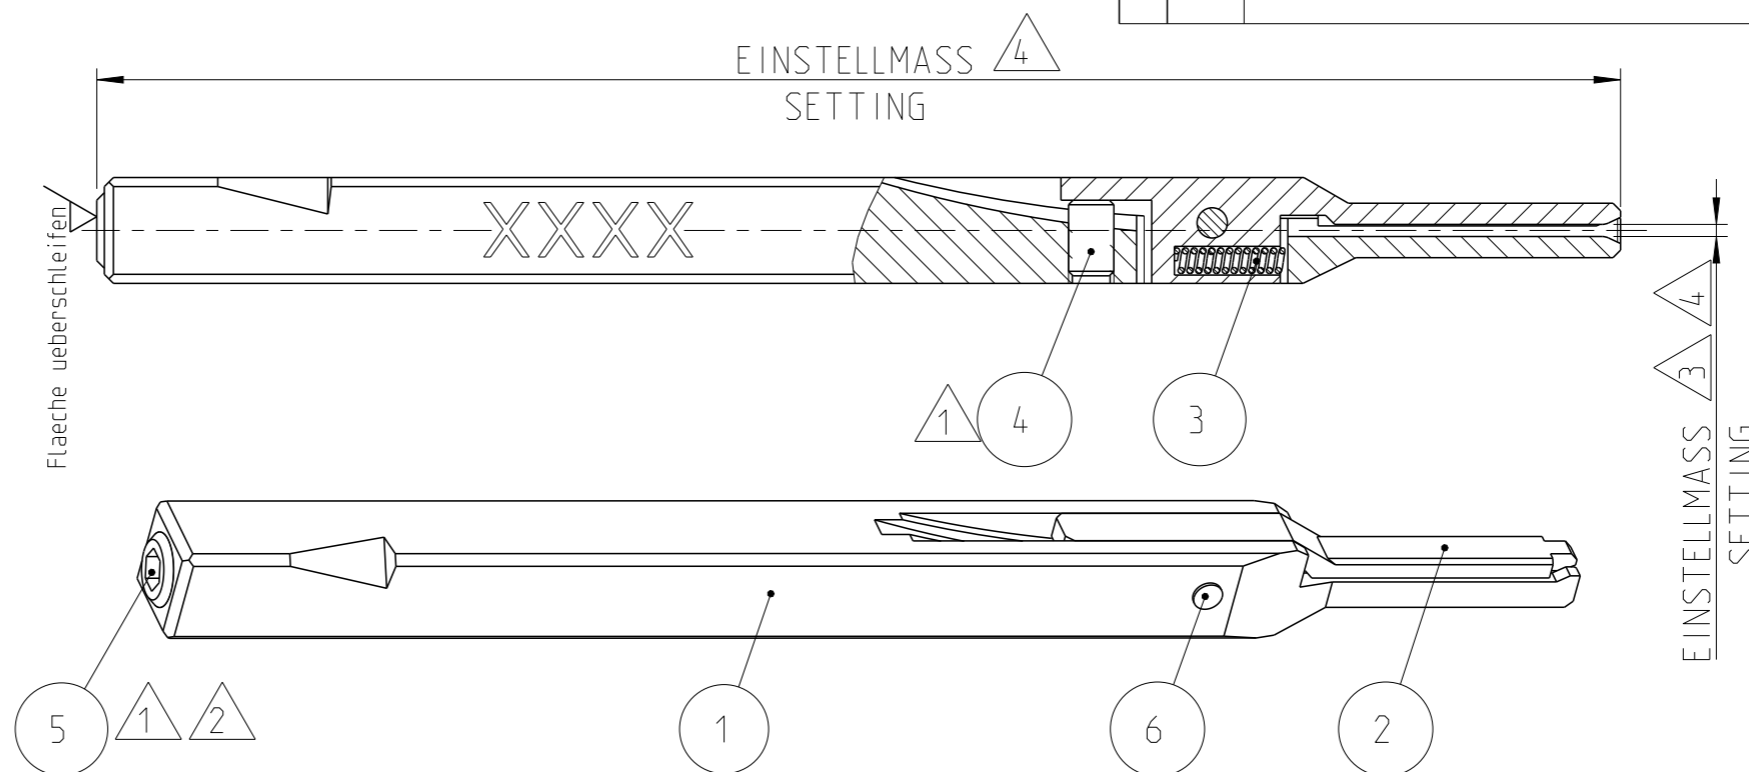

- 1 Mit Schraubensicherung
Loctite 243 gesichert
Locked with threadlocker
Loctite 243
- 2 Bei Erstmontage
vollständig einschrauben
Insert complete for
initial assembly
- 3 Öffnungsspiel Klemmhebel
zu eingelegtem Kontakt=0.1 mm
Opening clearance
clamping lever to
loaded contact=0.1 mm
- 4 !!!Achtung:
Vor Einsatz im Umbausatz
Maße kontrollieren und ggf.
einstellen.
Zu lang eingestellte Finger
können zu Beschädigungen
an Finger und Umbausatz
führen!!!
!!!Attention:
Check measurement before
using on a conversion kit.
Too long adjusted fingers
may damage the finger
and conversion kit!!!

| POS | QTY | TE/PN | PART REV | DESCRIPTION | WEAR | SPARE |
|-----|-----|-------------|----------|-----------------------------|------|-------|
| 1 | 1 | 1372477-9 | B | SETZFINGER INSERTION FINGER | - | - |
| 2 | 1 | 3-1372463-3 | C | KLEMMHEBEL CLAMPING LEVER | - | - |
| 3 | 1 | 8-547505-4 | A1 | Druckfeder - | - | YES |
| 4 | 1 | 2-519011-0 | B | SCREW M3x5 DIN 913 - | - | YES |
| 5 | 1 | 3-519011-7 | B | SCREW M5x8 DIN 913 - | - | YES |
| 6 | 1 | 519051-7 | A | Zyl.-Stift 2m6x8 DIN 6325 - | - | - |

| | | | | | | | |
|---|--|--------------------------|---|-------------|--------------------------|-----------------|-------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN M.BERGUNDE 10DEC2014 | TE Connectivity | | | | |
| DIMENSIONS: mm | | CHK - | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD - | NAME SETZFINGER KOMPLETT INSERTION FINGER COMPLETE | | | | |
| 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± | | PRODUCT SPEC - | | | | | |
| MATERIAL - | | APPLICATION SPEC - | SIZE A3 | CAGE CODE - | DRAWING NO C-4-1372415-8 | RESTRICTED TO - | |
| FINISH - | | WEIGHT 30g | Customer Drawing | | SCALE 2:1 | SHEET 1 OF 1 | REV B |