




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER ORIGINAL

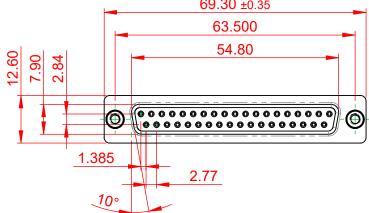

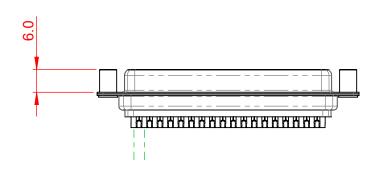





## NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATED OPERATING TEMPERATURE: -55°C to +105°C

**CURRENT RATING: 3A PER CONTACT** CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE:  $5000M\Omega$  min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.





THESE DRAWINGS AND SI ARE THE PROPERTY OF E SHALL NOT BE REPRODUC OR USED AS THE BASIS F MANUFACTURE OR SALE WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 628 ASSEMBLY					
DRAWN: C.B	DATE: AUG. 01/2018				
CHECKED:	DATE:				
SCALE: 1:1	SHEET 1 OF 1				
DRAWING NUMBER: 628-037-622-068					

	DRAWN: C.B		DATE:	AUG.	01/20	)18	
	CHECKED:		DATE:				_
SPECIFICATIONS EDAC INCAND	SCALE: 1:1		SHEET	1	OF	1	
ICED,OR COPIED FOR THE	DRAWING NUMBER:	628-037-622-068			ISSU	E	
OF APPARATUS MISSION.	PART NUMBER:	628-037-6	622-068			1	