





ISSUE NUMBER	
ORIGINAL	1

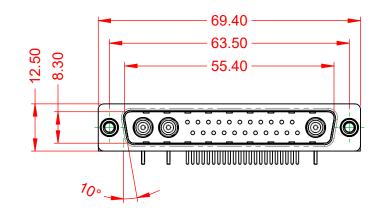




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

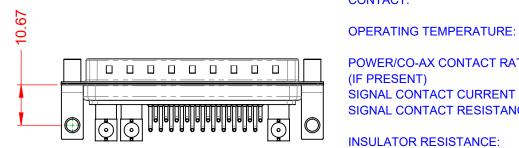

POWER/CO-AX CONTACT RATING:	50Ω (IMPEDA
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CON
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.


.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE: ANCE)

-55°C ~ 125°C

NTACT

1000V AC rms



	SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			DATE:	
EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 629-25W3	3240-5TE	ISSUE
		PART NUMBER: 629-25W	3240-5TE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

