


CABLE BLACK PRINT
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1 +
 24AWG/2C AWM STYLE 2725 80°C 30V VW-1

PIN ASSIGNMENT	
P1	P2
1 — RED	1
2 — WHITE	2
3 — GREEN	3
4 — BLACK	4
SHELL — DRAIN	SHELL

WSW order code	Cable length	PE BAG SIZE
AK669/2-18	1800±50mm	130*230*0.05mm
AK669/2-30	3000±50mm	130*230*0.05mm
AK669/2-50	5000±50mm	150*280*0.05mm

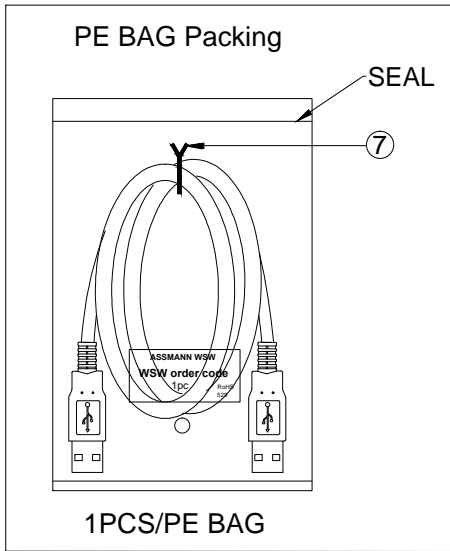

⑦	TIE	1	WHITE L=100mm
⑥	IN JACKET	3g	Clear LDPE
⑤	OUT JACKET	7g	Beige(IV-29#) PVC-40P
④	OUT JACKET	6g	Beige(IV-29#) PVC-40P
③	CABLE	1	Beige(IV-29#) USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
②	CONN	1	USB A FEMALE Nickel PIN G/F SHORT TYPE Insulator color:White
①	CONN	1	USB A MALE Nickel PIN G/F 3PCS TYPE Insulator color:White
No.	NAME	QTY	DESCRIPTION

- Electrical test:
- 100% short ,open,miswire test
 - Conduct resistance: 2Ω max.
 - Insulation resistance: 5M ohm(min)
 - Dielectric test: DC 300V

RoHS compliant
 Unit: mm

Scale	FREE					Date	Name	Customer-No.
TOLERANCE						Drawn	18.11.2014	Joanna
						Approved	18.11.2014	Joanna
DIM	TOL							
		①	Drawn	18.11.2014	Joanna			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.	
ASSMANN WSW-No. AK669/2-xx	
Drawing-No.	rev00
Replace	Sheet