



1 2 3 4 5 6 7

A A

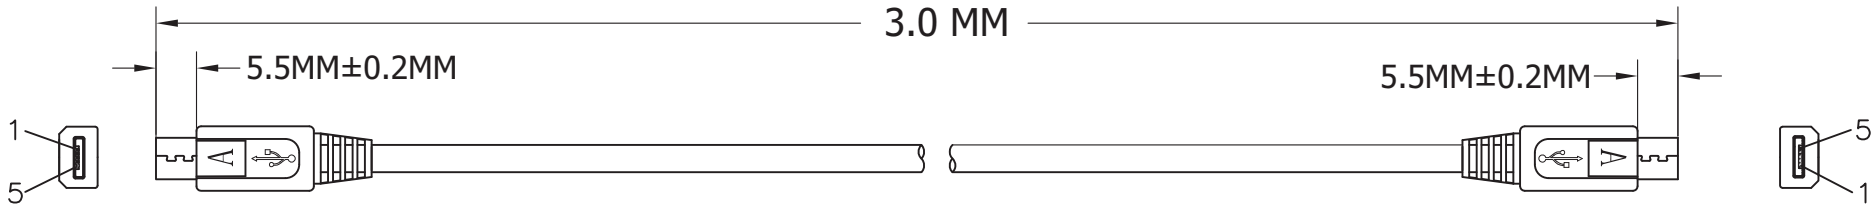

B B



P1



P2



C C

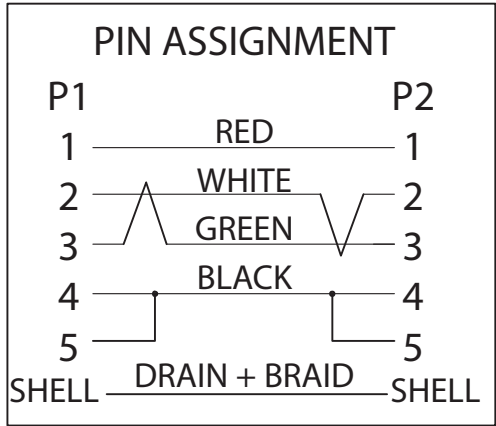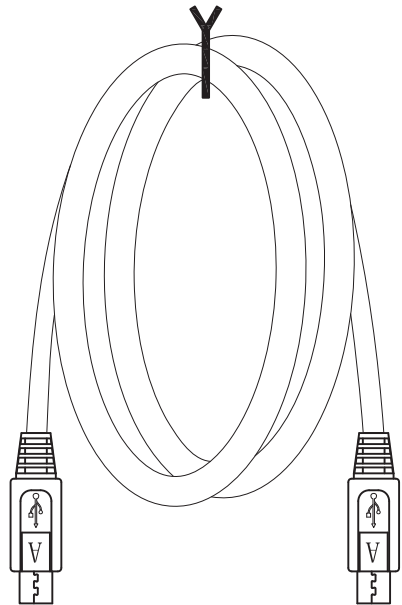

D D

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL):*1P+ 28AWG(7/0.12TC)*2C]+AEB(488 TC)
 - Jacket: Black
 - OD: 3.5MM
- Connectors: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-50P

E E

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC

F F



Scale	1:1							Name
TOLERANCE								Item No.
X.X	±0.40					Drawn	10.19.11	Chappell
X.XX	±0.25					Approved		
X.XXX	±0.15							Title
Angle	±3°							USB2.0 Micro Connection Cable, 3 Meters USB A Micro Male <=> USB A Micro Male
								Drawing No.
								Replace
								Sheet



AK67301-3-R

rev00

G G

H H

1 2 3 4 5 6 7