


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00424	Connector, USB A receptacle	1	
2	50-00432	Connector, USB A mini male	1	
3	30-00099	Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6mm, shielded, VW-1, PVC, 79A, USB 2.0, white	1	
4	24-00058	Overmold, jack, USB A	1	PVC, white
5	24-00022	Overmold, plug, USB mini A	1	PVC, white

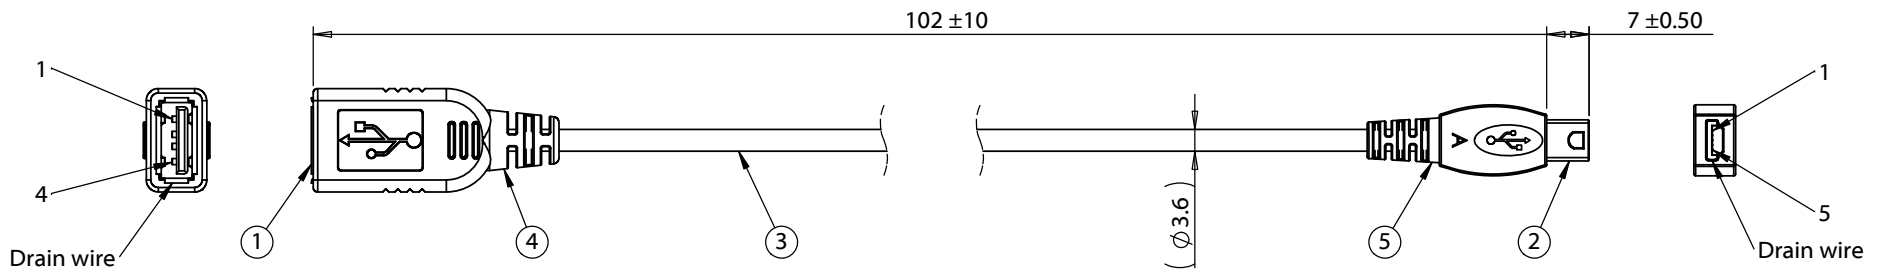

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring diagram		
50-00424	Wire Color	50-00432
1	Red	1
2	White	2
3	Green	3
4	Black	4 & 5
Shell	Drain & Shield	Shell

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	12/12/2008	Initial release	Verified:			RoHS compliant	
A1	11/17/2011	Updated wiring diagram	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent Description: Cable, 102 mm, USB A receptacle to mini USB A plug, 28 AWG 30-00099 wire, white	Size:	Part number:	
A2	11/30/2011	Included wire part number			A	10-00003	
A3	1/7/2014	Changed wire part number			Scale: 1:2		Sheet 1 of 1
A4	1/30/2014	Modified shield type					

5

4

3

2

1