
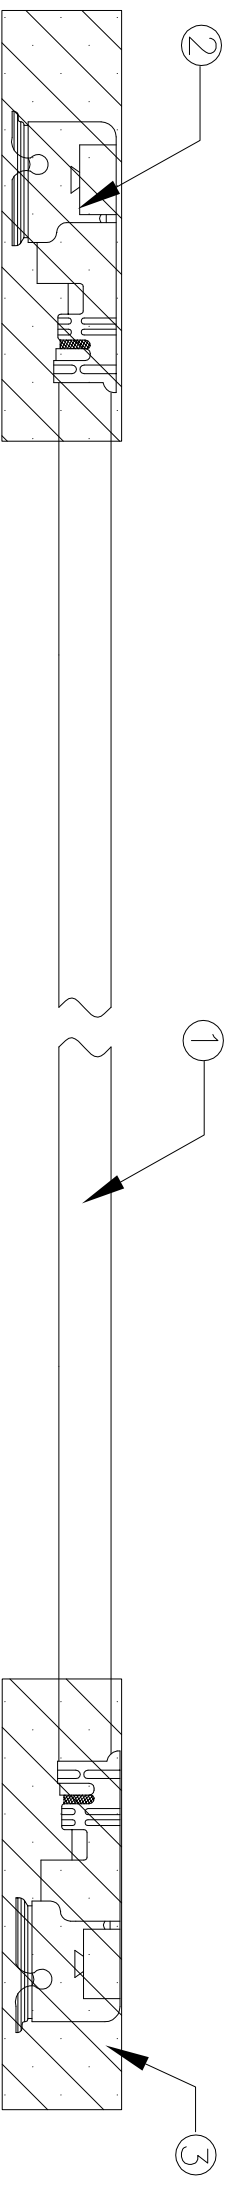


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

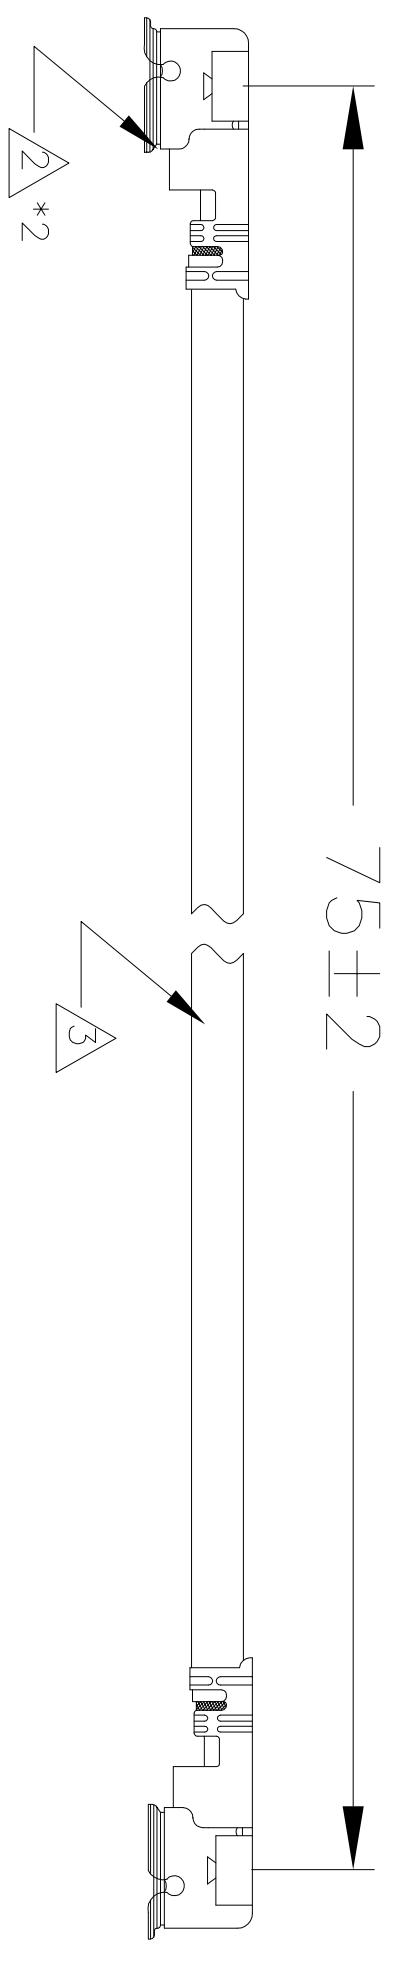

- NOTES:
1. CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY
 HI-POT: 200 VDC FOR 100MS
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHZ
 VSWR: 1.5:1 MAX
 2. CONNECTOR: TYPE III U.FL
 3. SUPPLIER: I-PEX 20278-112R-13
 CABLE: 1.13MM OD, JACKET RED, 50 OHMS FEP INSULATED
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
 4. TWO END U.FL CONNECTORS IN THE SAME POSITION
 5. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	± -

DWN	12FEB09	30	MM	PROTECT TUBING FOR I-PEX 20278	3
CHK	12FEB09	2	PC	I-PEX 20278-112R-13 CONNECTOR	2
APVD	12FEB09	75	MM	COAXIAL CABLE, RED COLOR, OD 1.13MM	1
Product spec		-1	U/M	DESCRIPTION	ITEM

Tyco Electronics
 Tyco Electronics Corporation
 Harrisburg, PA 17105-3608

FWT3 Ericsson UMTS/Aux cable assembly
 red, 75mm, 0degree

APVD	NAME	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
Lucky Zhang		A3	00779	1513279	
Application spec					
WEIGHT					
CUSTOMER DRAWING					