

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

.X ±0.25 .XX ±0.13

.XXX ±0.05

10.70


5.80



ISSUE NUMBER

ORIGINAL

(1)

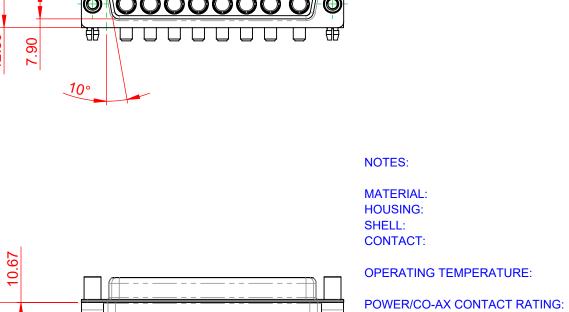

۲


COPPER ALLOY, 30µ GOLD PLATED -55°C ~ 125°C 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

WITHSTANDING VOLTAGE:

1000V AC rms

STEEL, TIN PLATED

THERMOPLASTIC POLYESTER, UL94V-0



			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
EDAG	EDAC INC TORONTO, ONTARIO CANADA O QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 630-8W8-650-3TD		ISSUE
YOUR CONNECTION			PART NUMBER: 630-8W8-	-650-3TD	1



20.33

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

Φ

6 0

۲

